



**Mazagon Dock Shipbuilders Ltd**  
**Corrigendum No. 01 dated 11.06.2024 to Tender No. 1600001955**

**Corrigendum No. 01 to Tender No. 1600001955 (E-Tender ID: 2024\_MDL\_94935\_1)**  
**Item: Design, Manufacture, Supply and Commissioning of Main Diesel Engine along with Propulsion Integration for Yard-16401 to Yard-16406 of NGOPVs for Indian Coast Guard Ships.**

Please refer to above mentioned tender hosted on MDL e-portal.

1. Tender due date and Opening Date:

	<b>Existing Date</b>	<b>Amended Date</b>
<b>Tender Closing Date</b>	14.06.2024	28.06.2024
<b>Tender Opening Date</b>	18.06.2024	02.07.2024

2. The Enclosure-1 of tender (SOTR ref: 3045 ver 0 dated 03.04.2024) is replaced with SOTR ref: 3045 ver 1 dated 29.05.2024. The revised SOTR and major technical changes are enclosed along with this corrigendum.
3. All other tender terms & conditions would remain unchanged.

**For MAZAGON DOCK SHIPBUILDERS LIMITED**

**Rupesh Mane**  
**DM (C-P15B & C.G.P.)**

**Enclosure for Letter No. PMT/ICGP/D-E, dt. 07.06.2024.**

Sl. No.	Clause / Reference of SOTR	Existing Clause	Amended Clause		
<b>Section II</b>					
1	(i) Incorporated at Para 1.8 Page No 31 (ii) Incorporated at Para 3.1 Page No 32 (iii) Incorporated at Para 3.3 Page No 32 (iv) Incorporated at Para 3.6 (c) Page No 32 (v) Incorporated at Para 3.6 (f) Page No 32 (vi) Incorporated at Para 3.6 (g) Page No 32 (vii) Incorporated at Para 3.6 (i) Page No 33 (viii) Incorporated at Para 3.6 (j) Page No 33 (ix) Incorporated at Para 3.6 (m) Page No 33 (x) Incorporated at Para 3.6 (o) Page No 33 (xi) Incorporated at Para 3.6 (q) Page No 34 (xii) Incorporated at Para 4, Page No 37	Newly added	(i) include "under supervision of shipyard". (ii) include "under supervision of shipyard". (iii) include "necessary approval of CGHQ". (iv) include "necessary approval of CGHQ". (v) Finalization of flexible coupling, to be with CG approval. (vi) with approval of CGHQ. (vii) Fit bolts to be class approved. (viii) Foundation and jacking bolts to be type approved. (ix) include "under supervision of shipyard". (x) EOT to be provided in Engine room also. (xi) vetted by class and with CGHQ approval. (xii) Following acronyms to be included. (a) H-Hold (Stage inspection is mandatory, inspection offer and report are to be documented and maintained). (b) W-Witness (Witness the activities performed during execution of a process).		
2	Incorporated at Para 4, Page No 34 -37	Newly added	Phase	Task Description	ICG Task Responsibility
			1	Model tests with stock propeller, confirmation of RPM Vs. Load	W
			1	Operating modes, endurance and range calculation	A
			Propulsion Plant Foundations		
			2	Design of propulsion plan seating / foundations / hull structure	H
			GA of Propulsion Plant		
			1	Engine room	H

				arrangement drawings incl. interfaces with the hull structure	
			2	Schematic drawings of the propulsion support system (fuel, lub oil, cooling water, air etc.)	A
			2	Specification of electrical interfaces to all component of propulsion system incl. propulsion control system block diagram	H
			2	Implement the RPM / Pitch schedules(combinatory curves)into IPMS to obtain optimum performance from the engines and propellers for all modes of operation	W
			2	Installation drawings for main components of control and monitoring system(electric cabinets)	A
Propulsion internal combustion engines					
			2	Propulsion Diesel Engine specification incl. load increase/decrease schedule, engine performance diagram etc.	A
			2	Propulsion Diesel Engine interface specifications (physical, mechanical, electrical)	H
			2	Installation drawings for diesel engine including mounting system, output coupling and flexible connection elements.	A
			2	Propulsion Diesel Engine support (auxiliary) systems requirements.	H
			2	Installation drawings for main components of support system of DE	A
Propulsion Reduction Gears					
			2	Propulsion Reduction Gear Interface Specification (physical,	H

				mechanical, electrical)	
			2	Installation drawings for reduction gears including mounting system and flexible connection elements	A
			2	Propulsion Reduction Gear support system requirements	H
			2	Installation drawings for main components of support system (Auxiliary equipment) of RG	A
Propulsion Clutches And Couplings					
			2	DE couplings drawings and engineering data	A
			2	Reduction Gear, Thrust Bearing, clutches data etc.	A
Propulsors					
			2	Shafting, Bearings and CPP specifications	To be vetted by class prior ICG approval
			2	Shafting, Bearings and CPP Interface specification (physical, mechanical, electrical)	H
			2	Propeller design	A
			2	Shafting, bearings and propellers; general arrangement drawings	A
			2	Shafting, Bearings and CPP support system requirements	H
			2	Installation drawings for main components of support system (Auxiliary equipment) of Shafting, Bearings and CPP	A
Installation Control Documents					
			2	Alignment drawing & procedure for propulsion plant installation (Propulsion plant Installation & Alignment procedure for pre- launch activities details including relevant templates for survey and inspection reports sheets with allowed deviations)	H
			2	Compile & update of the Control Documents for Physical, Mechanical &	H

			Electrical Interfaces (ICD). Coordination of Interface clarifications.	
			2 Torsional vibration analysis of propulsion system. Establish the mass-elastic & damping model, carry out the calculation and submit a report	A
			2 Exhaust Gas System Diagrams (uptakes)	A
			2 Pressure loss calculation of DE uptakes	A
			2 FAT procedure of DE, RG & SHAFTING	A
			2 Compilation of STW, HAT & SAT procedure	A
			2 Operating Instructions for the Local Mode operation	A

3	Para 7, Page No 38	Newly added	<p>(i) In addition to Para 26.4 of Section – I, the details of training activities are as follows:</p> <p>(a) Onboard Maintenance and operation of machinery &amp; equipment for complete crew – Onboard ship / yard promises for 05 weeks.</p> <p>(b) Main engine maintenance training for 04 (MDL) + 08 (ICG) executive – OEM promises for 02 weeks.</p> <p>(c) Main engine control maintenance training for 04 (MDL) + 08 (ICG) executive – OEM promises for 02 weeks.</p> <p>(ii) The participants shall make their own arrangement for traveling and boarding for such training.</p>	
---	--------------------	-------------	---	--

<b>Section III</b>				
4	Incorporated at Para 1.2, (1), Page No 39	Newly added	M/s. ZF and M/s. Brunvoll included in vendor list.	
5	Incorporated at Para 1.2, (1), Page No 39	Newly added	M/s.L&T and M/s. Brunvoll included in vendor list.	
6	Clause 2(a)	Corrected	Word “trail” is corrected as trial.	
7	Incorporated at Para 6.2, Page No 43	Newly added	Engines will have low specific fuel consumption, high MTBO. The MTBO for top overhaul and major overhaul to be specified by the OEM. MTBO for main engine to be not less than 38400Hrs.	
8	Incorporated at Section III, Para 6.15 Page No 44	Newly added	All the equipment to be supplied to have Indigenous facility for major overhauling.	
9	Incorporated at Section III, Para 6.16 Page No 44.	Newly added	The product support agency to be specified with correct address/Name/phone and service support team details. The OEM/PAC firm should be willing to comply to DPM/DPP as amended from time to time for repairs/supply spares during the life span of equipment.	
10	Incorporated at Section III, Para 6.17 Page No 44.	Newly added	Indigenous content in the product supplied and plan for “Make in India” to be indicated.	
11	Incorporated at Section	Newly	The firms/OEM should provide equivalent Indigenous lub	

	III, Para 6.18 Page No 44.	added	oil for the equipment/machinery offered. The equivalent indigenous lub oil should be as per CG policy on Lubs as for as possible
12	Incorporated at Section III, Para 6.19 Page No 44.	Newly added	The life cycle of the main engines offered with an annual operation of 2500 hrs to be submitted along with the technical offer. The life cycle cost, overhead/transportation cost if any etc.
13	Incorporated at Para 7.11 (m), Page No 46	Newly added	Include "Low lub oil pressure alarm w.r.t various engine RPM to be indicated as applicable".
14	Incorporated at Para 7.11 (f), Page No 45	Newly added	Recommended coolant additives and mix ratio to be indicated.
15	Incorporated at Para 7.11 (c), Page No 45	Newly added	Any requirement of LP/HP air required for main engine control/other requirements apart from engine starting to be specified.
16	Incorporated at Para 7.6, Page No 44	Newly added	The indicative IO list for integration with IPMS to be submitted.
17	Incorporated at Para 11, Page No 48	Newly added	List of start interlock to be indicated by the OEM.

24 pages more







MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 2 of 66

## TABLE OF CONTENTS

SR. NO.	DESCRIPTION	PAGE NO.
	<b>SECTION I:</b>	
--	INTRODUCTION	06
--	GENERAL REQUIREMENTS	07
1	Subject	07
2	Ship's Basic Particulars	07
3	Reference Environmental Conditions	07
3.3	Seaway Conditions	08
3.5	Propulsion Plant Operating Profile / Modes	08
4	Ship's Support Systems Supplies	09
5	Noise & Vibration	10
6	Noise Levels in Machinery Spaces	10
7	Vibration Isolators	10
8	Manning Policy	11
9	Control & Monitoring	11
10	Electrical Equipment Requirements	11
10.1	IP Rating for Electrical Equipment	11
11	Availability/ Reliability/ Redundancy/ Self Sufficiency	11
12	Documentation	12
12.4	Binding Design Documentation	12
12.5	Documentation Associated with Quality Assurance Plan, Equipment Manufacturing & FATs	14
12.6	Documentation Associated with STW/HATs/SATs	14
12.7	Technical Manuals for Equipment (Operation, Maintenance & Logistics)	14
13	Quality Assurance And Testing	16
13.1	Design Standards	16
13.3	Quality Assurance	17
13.4	FATs-(Factory Acceptance Trials)(Acceptance Test Procedure)ATP(QAP document)	17
13.5	Harbour Acceptance Trials/Sea Acceptance Trials	18
14	Maintenance & Logistics	18
15	Spares	19
15.2	Installation & Commissioning Consumables	19
15.3	On Board Spares (OBS)	19
15.7	Five-year Base & Depot Spares/Comprehensive Part Lists	20
16	Indigenization/Local Support	20
17	Product Support	21
18	Materials	21
19	Interchangeability	21
20	Tally and Diagram Plates	21
21	Instruction Plates	22
22	Painting	22
23	Lifting Arrangement	23



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 3 of 66

24	Preservation / Conditioning	23
25	Packing & Shipping	24
26	Training	25
27	Security of Information	25
28	Warranty	25
29	Planned Delivery Date	27
30	Weight Recording / Weight Certificate	27
31	Maintenance Management Software	27
32	Technical Assistance	28
33	Receipt Inspection	28
34	Price	28
35	Compliance Matrix	28
36	Technical Offer as Per Shipyard Tender	29
37	INSTRUMENTATION	30
<b>SECTION II: TECHNICAL SPECIFICATION OF PROPULSION INTEGRATION</b>		
1	Introduction	31
2	Scope Of Supply	31
3	Responsibility Of Integrator	31
4	Task Responsibility Matrix	33
5	Technical Assistance	37
6	Interface Meetings	37
<b>SECTION III: TECHNICAL DETAILS - MAIN DIESEL ENGINE</b>		
1	Introduction	39
2	Scope of Supply	39
3	Scope of Offer	41
4	Applicable Specifications	42
5	Mounting	42
6	Technical Requirements	43
7	Machinery Operation, Monitoring And Control System	44
8	Local Control And Monitoring Panel	45
9	Main Function Of LCP	47
10	Engine Controls	47
11	Instrumentation/ Alarm/Trips/ Interlocks	48
<b>ANNEXURES</b>		
1	General Point for Motors and Starters	49
2	Deviation List	54
3	Weight Control Data Sheet	55
4	Weight Certificate	56
5	Compliance Matrix	57
6	Checklist with offer	58
7	Manufacture's recommended list of Spares	61
8	Reference Drawing for SPTA boxes	63
9	Maintenance Management Software (MMS) format	64
10	Timelines for Tasks and Deliverables (Durations) of Prolusion	65





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	4 of 66

Package
---------

### ACRONYMS

CPP	-	Controllable Pitch Propellers
DE	-	Diesel Engine
DER	-	Diesel Engine Room
FATs	-	Factory Acceptance Trials
HATs	-	Harbour Acceptance Trials
HPU	-	Hydraulic Power Unit
IPMS	-	Integrated Platform Management System
MDL	-	M/s Mazagon Dock Shipbuilders Limited, Mumbai
OEM	-	Original Equipment Manufacturer
SATs	-	Sea Acceptance Trials
MCR	-	Machinery Control Center
STW	-	Setting to Work
CGRPT		Coast Guard Refit and Production Team
ICG		Indian Coast Guard
NGOPV		Next Generation Offshore Patrol Vessels



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 5 of 66

### LIST OF TABLES

SR. No.	DESCRIPTION	TABLE NO.
1	Ship's Basic Particulars	1
2	Reference Environmental Conditions for Equipment Design and Test Requirements	2
3	Seaway Conditions (Operational & Survival)	3
4	Propulsion Plant Operating Profile	4
5	Ship's Support Systems Supplies	5
6	Documentation	6
7	Binding Design Documentation	7
8	Technical Manuals (Operation, Maintenance & Logistics)	8



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406

MAIN DIESEL ENGINE

SOTR

3045

REV. NO.

01

DATE

29/05/2024

PAGE

6 of 66

## SECTION I

### INTRODUCTION

1. This General Specifications relate to Design, approval of the equipment by the classification society, Manufacture and Supply of 06 (six) ship set of Equipment for Project “Next Generation Offshore Patrol Vessels (NGOPVs)” of Indian Coast Guard.
2. Project 06 NGOPV consist of Diesel Engine propulsion system comprises of two propulsion plants, each plant consisting of one Diesel Engine driving a Controllable Pitch Propeller and External Fi-Fi pump through single input and twin output Reduction Gearbox and respective shaft line. Each propulsion plant broadly comprises of:
  - (a) One Diesel Engine of minimum 9000 KW power output.
  - (b) One single input, twin-output Reduction Gearbox with built in thrust block.
  - (c) One set of shafting along with associated components
  - (d) One Controllable Pitch Propeller
  - (e) Propulsion plant support systems (for Diesel engines, Gearboxes, Shafting & CPP)
  - (f) Associated Controls & Monitoring System.
3. Class notation for 06 NGOPV is:  
+ A1 HSC (E) (Special Government Service) + AMS NIBS +ACC +DPS-1, FFV1-NS CS-Ready, HELIDK (SRF) by ABS or equivalent LRS/DNV/GL/BV/IRS/NK.
4. The Supplier should submit the quotation based on the General Conditions & Requirements (GCR) and the Technical Requirement for Procurement of each equipment. Should there be any discrepancies between the GCR and the Technical requirement of each equipment, the technical requirement/ specification shall prevail.
5. The reference list of the equipment fitted in Indian or International Navy / Coast Guard or similar platform such as ocean going vessel, Offshore Platforms and Oil-Rigs to be submitted along with the offer.
6. The Year of production of equipment and system to be of latest manufacture (during or after Year 2023). This is to confirm to the current production standards and should have 100% of the defined life at the time of delivery.  
(other than permitted running hours during assembly / acceptance trials)
7. The list of indigenous lub oil / hydraulic oil to be furnished.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406

MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	7 of 66

## GENERAL CONDITIONS & REQUIREMENTS

- Subject:** The general conditions and requirements specified in this chapter are intended to meet the functional requirements of NGOPV platform with integral helicopter capable for operation in oceans environment and performance of all the ICG charter of duties.
- Ship's Basic Particulars:** Project 06 - NGOPV class of ships for ICG. Ship's basic particulars, are indicated below: -

**Table 1**

PARTICULARS		REFERENCE DATA
Ship's dimensions	Length overall (LOA)	115.3 m
	Beam (water line)	14.5 m
	Draft (deep displacement)	3.84 m
Ship's displacement	Deep displacement	Around 2880Tonnes
Endurance	At cruising speed of 12 to 15 knots	5000 NM
Expected ship's life		25 Years
Operating profile	Continuous slow speeds	Below 8 knots
	Cruising	08 - 15 knots
	Maximum	23 knots at 92% MCR at full load displacement
Unrestricted continuous rating of Diesel engine, at 45 degree centigrade ambient temperature		Min 9000 KW

### 3. Reference Environmental Conditions:

- 3.1 The equipment shall be suitable for marine applications and achieve specified performance smoothly under tropical marine conditions.
- 3.2 The equipment is to be designed for continuous operation & survival under the environmental conditions specified for ambient conditions as specified table below:-



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 8 of 66

**Table 2**

Sr. No.	Design Parameter	Value
(a)	Air Temperature	Minimum of 5 deg C and Maximum of 45 deg C
(b)	Sea water temperature	32 deg C
(c)	Relative humidity	90% at 35 deg C
(d)	Atmospheric pressure	750 mm of Hg column (1000mbar)

**3.3 Seaway Conditions:** Seaway conditions are defined at a sea water temperature of 1 to + 32 Deg. C, Ambient air temperature of 5 to 45 Deg. C and humidity up to 90% at 35 Deg. C. Salinity of water up to 35000 ppm. The equipment shall be capable of efficient and unrestricted operation without any deviation from its normal operating parameters under the seaway conditions, as below:-

**Table 3**

<b>Operational (up to sea state 7)</b>	
<b>Roll</b>	Maximum $\pm$ 22.5 degree
<b>Pitch</b>	Maximum $\pm$ 7.5 degree
<b>Survival (up to sea state 7)</b>	
<b>List</b>	Maximum $\pm$ 15 degree from vertical (permanent)
<b>Trim</b>	Maximum $\pm$ 05 degree

**3.3 Complement :**

(a)	Officers	11
(b)	Subordinate Officers	32
(c)	Others	78
	Total	121

**3.5 Propulsion Plant Operating Profile / Modes:** The ship is to be available for exploitation for minimum of 190 days in a year. Each shaft is expected to clock a minimum of 2500 running hours per year. Operational cycle of the ship will be around 36 months.

**3.6 Service life of ship:** The expected service life of ship is 30 years @ 2500 hrs. annual exploitation

**3.7 Operating Profile:** - The operating profile of the propulsion plants is indicated below.

	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)  Dockyard Road, Mumbai -400 010.	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
		<b>YARD MDL -</b>	<b>REV. NO.</b>	<b>01</b>
		<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>
		<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>9 of 66</b>

**Table 4**

<b>Sr. No.</b>	<b>Speed Range in knots (load in %)</b>	<b>% Time</b>
1	Below 8 knots (load 10-35%)	10
2	Above 08 to 15 knots (load 35-70%)	60
3	Above 15 and up to 20 knots (load 70-80%)	20
4	Above 20 knots (load 80-100%)	10

**3.8 Operating Modes:** - The propulsion plants are to provide propulsive power in the following modes:

- (a) Diesel engine in twin shaft drive; for attaining applicable speeds Within permissible power range for Ahead and Astern mode of operation.
- (b) Diesel engine in single shaft drive; while the other shaft being either trailed or locked; for attaining applicable speeds within permissible power range and torque limitations, for Astern mode of operation.


**4 Ship's Support Systems Supplies:** Following ship's support supplies shall be available for the propulsion system. For electrical supplies, in case of different requirements (voltage/frequency, etc.), the equipment supplier shall provide suitable provision (transformer/converter/UPS, etc.).

**Table 5**

<b>Sr.</b>	<b>SYSTEM</b>	<b>SUPPLIES</b>	<b>REMARKS</b>
(a)	Fuel system	Low sulphur high flash high speed diesel (LSHFHSD)	Indian equivalent
(b)	Lube oil system	Indian equivalent to be indicated by OEM	Indian Oil Ltd HPCL, BPCL equivalent
(c)	Compressed air system	High pressure air at working pressure of 30 bar & 30 cu m/hr. Suitable reduction available for working pressure at 30 bar & 7 bar.	Any other pressure requirement shall be met by the equipment supplier.
(e)	Fresh water system	Fresh water at 3 bar (approx.) shall be provided by ship's fresh water system.	Specific requirements to be indicated by equipment supplier.
(f)	Electrical	415 V AC @ 50 Hz, 3 phase 230 V AC @ 50 Hz, 1 phase	Any other power requirement shall be met by the equipment supplier.





	MAZAGON DOCK SHIPBUILDERS LTD.	DESIGN ENGINEERING	SOTR	3045
	(A Govt. Of India Undertaking)	YARD MDL – 16401/16402/16403/16404/16405/16406	REV. NO.	01
	Dockyard Road, Mumbai –400 010.	MAIN DIESEL ENGINE	DATE	29/05/2024
			PAGE	10 of 66

## 5. Noise & Vibration:

5.1 Design of the equipment along with its associated auxiliaries/accessories/controls and mounting system, should ensure minimal vibration and noise.

5.2 All components of the equipment and accessories are to be designed for ensuring resistance to misalignment due to forces of vibration.

5.3 Suitable flexible hoses, bellows and noise reduction clamps are to be used for associated piping connections with the main equipment/auxiliaries.

5.5 Specific requirements on Noise & Vibration are to be as per respective equipment Technical Specification for Procurement.

5.6 Noise and Vibration levels of the equipment shall meet the classification rules and guidelines.

6. **Noise Levels in Machinery Spaces:** Permissible noise levels in machinery spaces are to be in accordance ISO-6954:2000.

The noise criteria for the compartments are as follows:

Sr. No.	Compartments	DB(A)
1.	Machinery spaces	110
2.	MCR	75
3.	Work places	85
4.	Non Specific workshops	90
5.	Bridge and Chartroom	65
6.	Radio Rooms	65
7.	Cabins	60
8.	Dining Hall/Offices	65
9.	Service spaces (galley, pantry)	75
10.	Normally unoccupied spaces	90

## 7. Vibration Isolators (Anti Vibration Mounts):

7.1 For resiliently mounted equipment, the mounting system shall be capable of attenuating the vibrations of the offered equipment within the limit specified in Technical requirement.


7.2 The installation and connections of the equipment shall account for the extreme displacements that may occur under loading conditions. Wherever necessary, suitable stops/snubbers shall be provided to prevent excessive motion.

7.3 Vibration measurements are to be carried out as per ISO 4868(XII)/latest amendment.

7.4 Following data/details with respect to vibration isolators are to be submitted by the equipment supplier, along with the technical offer:

- (a) Type and quantity
- (b) Characteristics (including dimensions)
- (c) Footprint indicating position of mounts
- (d) Rated load, deflection in three axis and natural frequency
- (e) Resilient Mounting Calculations.
- (f) Shelf life for each type of Anti Vibration Mounts & Vibration Isolator



	MAZAGON DOCK SHIPBUILDERS LTD.	DESIGN ENGINEERING	SOTR	3045
	(A Govt. Of India Undertaking)	YARD MDL – 16401/16402/16403/16404/16405/16406	REV. NO.	01
	Dockyard Road, Mumbai –400 010.	MAIN DIESEL ENGINE	DATE	29/05/2024
			PAGE	11 of 66

grouping procedure are to be indicated in the offer.

- (g) Procedure to preserve the Anti Vibration Mounts & Vibration Isolator and their installation on Board the ship shall be given in the Installation document of the equipment.

#### 8. **Manning Policy:**

- 8.1 The machinery spaces are envisaged for unmanned continuous operation. The spaces will be attended for starting/shutdown procedures and for routine checks. The control and monitoring requirements are therefore to be designed keeping the manning policy in mind. However, in degraded condition, the equipment will be operated & controlled from the local control position.
- 8.2 All propulsion machinery shall be capable of control at the equipment level and from each specified remote control station.

#### 9. **Control & Monitoring:**

- 9.1 Propulsion system and auxiliary equipment shall be operated, controlled and monitored for unmanned continuous operation. Propulsion plants and its associated equipment and support systems are located in various compartments/spaces, on-board the ship. These compartments/spaces would be attended for starting/shut down operations and for routine checks as applicable.
- 9.2 Suitable control and monitoring system shall be provided by equipment supplier, with provision of operating equipment from local position (Local Control Panel) as well as from remote position (through ship's IPMS). All sensors, instrumentation and interfaces required for local and remote control shall be provided by equipment supplier, including associated actuators, interlocks, safety cut-outs, alarms, etc.
- 9.3 Pressure gauges and electrical indicators are to be selected as per marine grade standard (electrical indication instruments) guide to selection of sensors for measurement of parameters; pressure, flow, liquid level, temperature) or equivalent standard. Other instrumentation & sensors are to be selected, keeping into account high quality and reliability for marine applications and should be commercially available worldwide. Equipment supplier shall provide all data/details, specifications, test certificates, calibration procedure and source of procurement, for the instrumentation & sensors as part of scope of supply.


10. **Electrical Equipment Requirements:** General requirements for electrical equipment (including Motors & Starters) shall confirm as per attached Annexure – 1.

10.1 **IP Rating for Electrical Equipment:** IP rating for associated electrical equipment enclosure is IP 44. Specific IP rating to be as per Technical specification requirement in Section II.

11. **Availability/ Reliability/ Redundancy/ Self Sufficiency:** Maximum time required for bringing the equipment to full operational condition while undertaking daily, weekly and monthly maintenance routines, are to be indicated by the equipment supplier.

11.1 Equipment should be robust in design for ensuring high reliability, ease of operation



	MAZAGON DOCK SHIPBUILDERS LTD. (A Govt. Of India Undertaking)	DESIGN ENGINEERING YARD MDL – 16401/16402/16403/16404/16405/16406	SOTR REV. NO. DATE	3045 01 29/05/2024
	Dockyard Road, Mumbai –400 010.	MAIN DIESEL ENGINE	PAGE	12 of 66

and minimum maintenance.

12. **Documentation:** Various documentation will be submitted by the equipment supplier as per the scope of supply and responsibility. Quality documentation is to be submitted in comprehensive and time bound manner for meeting ship's detailed design and production targets as well as equipment production and delivery schedule. Documentation to be submitted by the equipment supplier are broadly indicated below:

**Table 6**

Sr. No.	Documentation	Remarks
(a)	Binding design documentation	For progressing with detailed design, integration & installation.
(b)	(i) Quality Assurance Plan (QAP) (ii) Equipment manufacturing/production documentation (iii) Test & Trial procedure/documents and Reports	For approval by ABS and IRS equipment quality assurance during production and FATs accordingly.
(c)	Equipment STW/HATs/SATs documentation	For preparing installation inspection/trials documentation
(d)	Technical Manuals for equipment operation, maintenance, logistics, etc.	For ship's crew, training and repair organizations.

12.1 All documentation (including documents, drawings, data, reports, manuals, etc.) should be in English language. Dimensional details in the drawings should be as per scale. Technical data and parameters should be in metric units (SI Units).

12.2 Following file/formats would be acceptable:

- Documents, data & reports in MS-WORD/EXCEL, as applicable
- Data base files in ACCESS
- Orthographic drawings (2D) in DXF/DWG format
- 3D model of external topography of the equipment only in AVEVA MARINE/.STP format of max size of 5 MB.

Above drawings/data are to be submitted in soft copies in latest software version.

12.3 Hard documents to be provided suitably grouped (section wise H, E, L, Navigation & Communication etc.) indexed and in moisture proof bound folders.

12.4 **Binding Design Documentation:** Comprehensive list of binding design documentation is to be submitted by equipment supplier, in a structured manner under various levels (I, II & III), along with time schedule. Indicative list (but not limited to) is mentioned below:





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	13 of 66

**Table 7**

Sr. No.	DRAWINGS / DOCUMENTATION
<b>Level I : Submission <u>within 04 weeks</u> of placement of order by Shipyard</b>	
(a)	Technical description on main equipment along-with associated auxiliaries/components with operating principle
(b)	General arrangement drawing of equipment and major sub-assemblies along with footprint in 1:25 or appropriate scale
(c)	Assembly drawings of main & associated auxiliaries/components including:- <ul style="list-style-type: none"><li>• Main dimensions</li><li>• Vibration Mounting arrangement</li><li>• Bolting plan</li><li>• Position &amp; dimension of all Interface details</li><li>• Operational and maintenance envelopes</li><li>• Weights</li><li>• Materials with their specifications</li><li>• Centre of gravity &amp; lifting points</li><li>• Flow rate &amp; direction</li><li>• Etc.</li></ul>
(d)	Equipment performance data
(e)	Characteristics data, curves, efficiency, etc., related to equipment performance
(f)	Heat emission data
(g)	Equipment support systems functional specifications, as applicable along with schematic drawings (such as starting, fuel, lub oil, compressed air, intake, uptake, cooling, hydraulic, vents/drains, controls/monitoring, etc.) including interfaces with shipboard systems
(h)	Data/details for equipment foundation design and interfaces with ship structure
(j)	Any other design data/details, calculations, analysis, specifications, drawings, etc., as applicable
<b>Level II : Submission <u>within 05 weeks</u> of placement of order by Shipyard</b>	
(a)	Equipment control & monitoring data/details along-with structured list of sensors, signals & instrumentation (including in-built sensors for online health condition monitoring)
(b)	Control & monitoring interface data/details for interface with other propulsion equipment and ship's IPMS
(c)	Electrical specifications & wiring diagrams for associated electrical components, local control panels, etc.
(d)	Detailed definition of all terminal points and interfaces, major terminal box diagram, winding & performance data sheet.
(e)	Noise and vibration data/details
(f)	Any other design data/details, calculations, analysis, specifications, drawings, etc., as applicable



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	14 of 66

**Level III : Submission 06 weeks of placement of order by Shipyard**

(a)	Installation drawings, with interfaces and tolerances; main equipment along-with associated auxiliaries/components along with seat machining requirement & torque value of bolts which are tightened in situ.
(b)	Equipment alignment calculations and its procedure
(c)	Shipping/Unshipping requirements
(d)	List of special tools, instrument, Handling & lifting gear (including jigs & fixtures), as applicable forming part of deliverables and associated procedure
(e)	Flushing requirements and procedure for equipment and its support systems
(f)	Preservation, re-preservation and upkeep procedure; including requirement of preservatives (oils, greases, etc.) with international or NATO equivalents along with chemical composition and physical properties.
(g)	Vibration Analysis; Torsional, Lateral & Longitudinal, as applicable
(h)	Reliability, Maintainability and Availability analysis
(i)	Failure Mode and Effect Analysis (FMEA) (if applicable)
(j)	Training plan
(k)	Any other documentation, as applicable

**12.5 Documentation Associated with Quality Assurance Plan, Equipment Manufacturing & FATs:** Documentation associated with quality assurance plan (QAP), equipment manufacturing and FATs(Factory Acceptance Tests), will be submitted by the equipment supplier in time bound manner, well in advance for approval by the designated classification society.

12.5.1 While preliminary quality assurance & test plan shall be submitted by the equipment supplier along with the technical offer, detailed QAP is to be submitted within 15 days after placement of equipment order, for approval of ABS and IRS class.

12.5.2 Prior to commencement of equipment production activities, equipment supplier shall consult designated Classes and Shipyard/ICG.

12.5.3 Documentation associated with equipment manufacturing would be submitted by equipment supplier progressively in time bound manner, for approval by designated classes.

12.5.4 Documentation associated with equipment FATs procedure shall also be submitted by equipment supplier well in advance in time bound manner, for approval by the designated inspection classification society.

**12.6 Documentation Associated with STW/HATs/SATs:** Documentation associated with equipment setting To Work (STW)/Harbour Acceptance Trials (HATs)/Sea Acceptance Trials (SATs), shall be submitted by the equipment supplier within the agreed time schedule, with Shipyard/Indian coastguard.

12.6.1 HATS/SATS documents shall include HATS/SATs schedule, procedure, pre-requisites, data to be recorded, time interval for data recording, formats for data recording, safety and precautions to be observed during trials, estimated time of the trials and all other relevant data/information required for the successful completion of the trials.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	15 of 66

**12.7 Technical Manuals for Equipment (Operation, Maintenance & Logistics) :** The technical manuals/documentation pertaining to equipment & its associated auxiliaries/support systems, shall include technical description/information, specifications, drawings, performance data, installation, operational & maintenance requirements, spares & logistics, etc., in systematic, structured & comprehensive manner.

12.7.1 Under operating instructions, pre-starting inspection/checks, starting & shutdown procedures, functional parameters, trouble shooting, fault analysis, precautions, etc. to be suitably covered.

12.7.2 Procedures for undertaking all maintenance routines till the end of service life (for the entire life cycle) (including major overhaul), are to be clearly specified along with preservation/de-preservation & upkeep requirements (when equipment is not in use, during long refit of ship).

12.7.3 Procedures for setting to work, test & trials of equipment are also to be well documented.

12.7.4 Following technical manuals/documentation (in hard and soft form) shall be provided by the equipment supplier along with equipment supply.

**Table 8**

Description	Content	Total No of copies
Technical Manuals	Technical Description and Operating Instructions Manual	20
	On board Maintenance Manual	20
	Field and Depot Maintenance Manual	20
	Installation and Testing Manual	20
	Parts and Tools Catalogue including CPL & PIL in ILMS/SLMS Format	20
Technical Documentation	Installation Drawings	20
	As fitted Drawings	20
	Applicable Standards Utilised	20
	Test Procedure and Documentation	20
	Certified Test Reports (FATs, Material Test Certificates, Calibration Certificates, Weight Certificate etc.) & Records (including Type Test Certificate).	20



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING	SOTR	3045
YARD MDL - 16401/16402/16403/1640 4/16405/16406	REV. NO.	01
MAIN DIESEL ENGINE	DATE	29/05/2024
	PAGE	16 of 66

NOTE: 1) Draft copy of the above listed Manuals & Documentations (in hard and soft form) shall be prepared by the supplier and shall be submitted to shipyards for comments & to classification society under copy to MDL/ICG for approval, well ahead of the delivery date of the equipment. Approval on the same shall be given within two weeks of receipt of the Manuals & Documentations complete in all respects & required format.

2) Delivery of main equipment shall be considered completed only on receipt of all approved Manuals & Documentations as detailed in Table -8 above.

3) All Manuals & Documentations should be categorised as per the above subject/content description only.

13 **Quality Assurance And Testing:** Quality assurance and testing requirements, pertaining to this equipment should confirm to standard conditions of quality assurance of ABS and IRS.

13.1 **Design Standards:** Following rules and regulations as applicable shall be met:

- (a) Nominated Classification Society Class Rules.
- (b) International load line reg. 1966 as amended by Protocol of 1988 and any other subsequent amendments.
- (c) IMO/MARPOL-73/78 reg and any further / latest amendments including MS Act 58 and their rules.
- (d) COLREG 72 and any further/ latest amendments.
- (e) IMO /Anti Fouling System.
- (f) International tonnage 1969 and any further/ latest amendments.
- (g) SOLAS 1992 as amended in 2002 and any further / latest amendments.
- (h) Stability standard as per NES 109.
- (i) Naval Magazine Explosive Regulations (NMER).
- (j) Helo deck Regulation as per IRS Rules and Regulations for construction of Coast Guard Vessels (Ch-5, Section -8) or equivalent ABS/LRS/BV/DNV/GL/NK rules.
- (k) Superior/higher specifications of standard are acceptable subject to proving and satisfactory trial by Yard.

13.2 During execution of the project, following organizations would be associated for ship



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	17 of 66

design, construction, quality control and Ship trials/acceptance:-

- |     |                 |   |   |
|-----|-----------------|---|---|
| (a) | Design          | : | Shipyard / Nominated Classification society |
| (b) | Construction    | : | MDL and CGRPT Mumbai, at Shipyard.          |
| (c) | Quality Control | : | Nominated Classification society            |
| (d) | Ship Trials     | : | Indian Coast Guard/Shipyard.                |

**13.3 Quality Standard:** Design and production of equipment should conform to the best worldwide engineering practices, for ensuring high quality, reliability, durability, ease of operation and maintenance for meeting the ship's requirements.

13.3.1 During equipment production the equipment shall be subjected to various stage inspections. Equipment supplier shall ensure high quality of production as per approved quality assurance plan. Quality assurance should meet the specified standards and intent of ISO 9001: 2015 (quality management systems) or its latest version.

13.3.2 During equipment production, any deviation to the QAP/finalized specifications/standards shall be brought to the notice of designated inspection organization and Shipyard/ICG, along with valid reasons and recommended solution, without any compromise on quality, reliability and performance of the equipment.

**13.4 FATs-(Factory Acceptance Trials)(Acceptance Test Procedure)ATP(QAP document)**

13.4.1 In order to verify its correct assembly and operation, each equipment, which is not subjected to the type-test, shall be subjected to Factory Acceptance Trials as per established proven engineering practice. A detailed FATs program and post-test inspections to demonstrate performance characteristics and guaranteed parameters of the equipment shall be prepared and submitted by the supplier for approval.

13.4.2 All the parameters/performance required to be checked during HATs/SATs must be included in the FATs & duly noted.


13.4.3 During Factory Acceptance Trials, the supplied equipment is to be installed on the test bed and operated in the same way as it will be on board the vessel. Any correction applied for different environmental and installation conditions shall be duly notified to Coastguard/shipyard seeking their approval.

13.4.4 The testing installation shall provide for a mounting arrangement of equal stiffness as expected one for the ship structure where the unit will be seating.

13.4.5 The schedule for inspection, test & trials should be drawn up in such a way that all inspections including component level inspection, trials of subassemblies, etc., should be, as far as practicable performed at the corresponding stage of manufacture. Detailed measurements should be carried out at the appropriate stage of manufacture.

13.4.6 Factory Acceptance Trials shall be offered to, witnessed & accepted by ICG reps / Classification Society as indicated in the Purchase order. The FATs shall also be



	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)  Dockyard Road, Mumbai –400 010.	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
		<b>YARD MDL –</b>	<b>REV. NO.</b>	<b>01</b>
		<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>
		<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>18 of 66</b>

witnessed by shipyard representative,

13.4.7 The supplier shall provide a detailed program of workshop and shipboard tests and post test inspection to demonstrate the performance characteristics and the guaranteed parameters of the equipment for approval by the shipyard/ Indian Coastguard, in the technical offer.

13.4.8 All defects observed or developed during the inspection/ testing are to be rectified free of cost before dispatch to shipyard.

13.4.9 Documentation on equipment FATs procedure is to be submitted by equipment supplier in time bound manner, well in advance for approval by the designated inspection organization. For conducting equipment official FATs, around 12 weeks advance notice shall be given by equipment supplier to designated inspection organization/Shipyard/ICG, for participation in FATs. On successful completion of factory acceptances tests, complete FATs report duly certified by the designated inspection organization, shall be submitted to designated inspection organization/Shipyard/Indian Coast Guard within 02 weeks' time.

**13.5 Harbour Acceptance Trials/Sea Acceptance Trials:** On board trials shall be conducted by Shipyard based upon HATs/SATs documentation and ship's trials schedule, which would be planned by shipyard in consultation of equipment suppliers/Trial organizations/Indian Coast Guard. Draft HATs/SATs schedule in accordance to DME 303 D or equivalent International Standards is to be submitted by the firm for concurrence of ICG.

13.5.1 During equipment setting to work and HATs/SATs, equipment suppliers shall assist and offer the respective equipment trials for their successful completion. Equipment testing, tuning and any defect rectification during on board trials shall be undertaken by the equipment supplier in efficient and effective manner.

13.5.2 HATS/SATS documents shall include HATS/SATs schedule, procedure, pre-requisites, data to be recorded, time interval for data recording, formats for data recording, safety and precautions to be observed during trials, estimated time of the trials and all other relevant data/information required for the successful completion of the trials.

13.5.3 Shipyard will prepare GRAQs (General Requirement of Acceptance of Quality), trial document, based on the HATS/SATs document submitted by the supplier. The same shall be forwarded to the supplier for their vetting.

13.5.4 HATS/SATs shall be carried out to the satisfaction of ICG as per approved Test and Trial document.

13.5.5 Noise and Vibration trials shall be conducted as desired by ICG team / CGRPT. Points for measurement of vibration limits shall be indicated by OEM.

13.5.6 Supplier shall offer / assist HATs and SATs of respective equipment and attest the test and trial document forms on their successful completion.





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	19 of 66

13.5.7 The major/critical parts of the equipment shall be subject to inspections during the post-CST (SATs) dry docking of the ship.

#### 14 **Maintenance & Logistics:**

- 14.1 Equipment supplier shall ensure high reliability and low maintenance of equipment.
- 14.2 While equipment maintenance and repair between major overhauls would be carried out in-situ on-board the ship, major maintenance/overhaul would be undertaken ashore by repair organization.
- 14.3 Equipment design should therefore ensure ease of maintenance and accessibility to important sub-assemblies/components/accessories.
- 14.4 Suitable provisions (such as inspection windows, etc.) as feasible, are to be made for ease of in-situ visual inspection of important sub-assemblies/components/accessories for routine inspection, checks and maintenance, without dismantling the equipment assembly/components.
- 14.5 Equipment supplier shall provide maintenance schedules, planned maintenance intervals and procedure for undertaking maintenance of equipment on-board and ashore.

15 **Spares:** - Installation & Commissioning Consumable, On-Board Spares, Base & Depot Spares, special tools, test equipment, etc., are to be recommended by equipment supplier, taking into account operational and maintenance requirements of the equipment. Equipment supplier shall submit comprehensive list of all types of spares & tools under appropriate category along with the technical offer. Different categories of spares & tools shall be supplied, in consultation with Shipyard/ICG, based upon ranging and scaling by ICG.

15.1 Documentation for equipment spares shall include Comprehensive Part List (CPL) & Part Identification List (PIL), for meeting ICG's Logistics Management System (LMS)/Ship's Logistics Management System (SLMS) requirements. All details on spares are to be submitted by equipment supplier in compatible format in electronic media.

#### 15.2 **Installation Tools and Commissioning Consumables:**

15.2.1 Installation Tools: Special tools, jigs and fixtures & test equipment required for flushing, setting to work, testing & tuning, on-board trials (HATs/SATs) and post CST inspection of critical internal parts and reassembly of the equipment and its auxiliary systems shall be supplied. Tools shall be ordered along with the main equipment & delivered along with the main equipment.

15.2.2 **Commissioning Consumables:** The Commissioning consumables (first charge like coolants, greases, special oil, filters, gaskets, refrigerant etc.) shall be included in the scope of supply. Commissioning consumables shall be delivered before STW of the main equipment, tentative schedule of which shall be indicated in the Tender Enquiry.

15.2.3 An itemised list with cost for the same is also to be indicated in the offer to facilitate their procurement in future, if required.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING	SOTR	3045
YARD MDL – 16401/16402/16403/1640 4/16405/16406	REV. NO.	01
MAIN DIESEL ENGINE	DATE	29/05/2024
	PAGE	20 of 66

15.2.4 One set of standard tools adequate for undertaking the maintenance on-board should be supplied along with the offer.

**15.3 On Board Spares (OBS):**

- (i) The manufacturer's recommended list of On-Board Spares (MRL-OBS) required for servicing and maintenance, including breakdown maintenance for two years of operation after completion of the warranty period, should be included in the scope of supply. A list of On-Board Spares along with the maintenance schedule is to be submitted. The On-Board Spares and special tools shall cater to all on-board maintenance routines and possible repair requirements. Preservation requirements of On-Board Spares, if any, shall be indicated in the offer. The list of On-Board Spares required for auxiliary equipment/system shall also be indicated in the offer.
- (ii) An item-wise list with cost (in LMS format to be submitted in soft copy in Excel) of On-Board Spares, special tools, and test equipment should be as per **Annexure 7**.
- (iii) In case of any defect or deficiency observed in OBS while handing over to ship crew, the same may be made good by the vendor without any cost implication.
- (iv) All the above OBS spares are to be duly packed in SPTA (Spare parts Tools & Accessories) boxes. For Preferred sizes and material, Refer Annexure 8.
- (v) The Manufacturer's Recommended List of On-Board Spares has to be recommended based on the likely consumption rate of the spares and on the exploitation pattern of the equipment.
- (vi) The Manufacturer's Recommended List of On-Board Spares has to be recommended based on the likely consumption rate of the spares and on the exploitation pattern of the equipment.
- (vii) Firms quoting lesser Manufacturer's Recommended List of On-Board Spares in terms of range and depth will have to make good deficiencies at their cost without any financial responsibility or liability to ICG/MDL within 30 days of intimation to render equipment operational.
- (viii) A certificate of sufficiency of Manufacturer's Recommended List of On-Board Spares is to be submitted by the firm for 03 years of operation of the ship.
- (ix) The Manufacturer's Recommended List of On-Board Spares should also include the spare conforming to Classification Society rule requirements for the vessel.
- (x) The MDL/ICG would have the option to amend the list of OBS proposed by the firm during the TNC of the equipment within the quoted price to ensure its sufficiency, based on its past experience of the exploitation of the same or similar equipment.

**15.4 Five-year Base & Depot Spares/Comprehensive Part Lists:** Base & depot spares are to cover spares requirements for major maintenance/overhaul requirements for 5 years including two refits.

15.4.1 Recommendation for insurance, on long term storage may be indicated. The firm is to submit Comprehensive Part Identification List (CPIL) and Manufacturer Recommended List of Spares (MRLS) for five years exploitation and maintenance.

15.4.2 Itemized list with cost in editable format along with a copy of the maintenance schedule for the equipment is to be provided in the offer. Itemized list (in LMS format to be submitted in soft copy in excel) of Base & Depot spares should be as per Annexure "7"

15.4.3 The B & D Spares shall be procured by MDL on behalf of Indian Coastguard. The B &





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	21 of 66

D Spares shall be ordered at a later date, after ranging and scaling of the Spares done by Indian Coast Guard.

- 15.4.4 The delivery of B&D Spares shall be prior to the Commissioning of the First of Class Ship. Delivery date for the supply of B & D Spares shall be indicated in the Tender Enquiry
- 15.4.5 Quotation for MRL-B&D along with part no for five years exploitation with price to be supplied along with the offer with item wise cost.

16 **INDIGINISATION / LOCAL SUPPORT** : (Applicable to equipment with import content)

16.1 The supplier is to indicate if the equipment is original OEM supply or manufactured in INDIA under license (specifying the import content). The manufacturer is to engage into a co-operation with a reputed manufacturer of similar equipment's in India and accordingly plan for progressive indigenization.

16.2 In this respect, the equipment manufacturer shall confirm that he will be able to authorize priority works at his works and provide the necessary local support as required to meet the ship construction and trial programme and provide the necessary after sale support to the ICG. Future plans for indigenous production of the equipment associated control/monitoring devices and transfers of technology are to be indicated in the proposal for consideration of Indian Coast Guard Headquarters.

17 **Product Support:** Equipment supplier is to provide product support for ship's life of 25 years. In case the equipment is likely to be obsolescent, the supplier shall notify the Coast Guard with at least two years prior notice, along with valid reasons and recommended solution.

- The firm/OEM to submit undertaking to provide product support for minimum period of 25 years from date of delivery of the vessel.
- Undertaking for upgrade/currency of software for all equipment min 05 years from date of delivery of vessel. In case of obsolescence within 05 years from date of delivery of the 06 NGOPV , the same to be upgraded without any additional cost.
- Firm to indicate after sales and product support facilities in India with response time for attending defect and providing spares.
- All upgradation and modification carried out on equipment during its life cycle must to be intimated to ICG. Further, any upgradation/modification during guarantee period of the equipment same to be included free of cost.
- Firm should agree to enter into the rate contract / All-inclusive Annual maintenance contract (AIAMC) with ICG for maintenance and supply of spares.

17.1 **Operational Cycle: The operating refit cycle of ship is as follows:**

- 1<sup>st</sup> and 2<sup>nd</sup> Ops refit cycle – Operation cycle of 24 months followed by a refit.
- 3<sup>rd</sup> and 4<sup>th</sup> Ops refit cycle – Operation cycle of 18 month followed by a refit.
- Balance Ops and refit cycle – Operation cycle of 15 month followed by a refit.
- First three refits are short refit (SR) followed by a normal refit (NR). Second NR will be medium repair (MR).
- Short refit is for duration of 04 months. Normal refit is for duration of 05 months and

	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking) Dockyard Road, Mumbai -400 010.	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
		<b>YARD MDL –</b>	<b>REV. NO.</b>	<b>01</b>
		<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>
		<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>22 of 66</b>

medium refit for duration of 12 months.

18 **Materials:** A component wise material list (with specifications) is to be provided by the equipment supplier. Standard materials for use on board ocean going ships are only to be used. Various materials used shall be in accordance with the stipulated requirements as per international Standard, as stated in the equipment technical specifications. Any deviation from specified materials is to be informed to Shipyard/Indian coast Guard in the Deviation List placed at **Annexure- '2'** with suitable reasons and justifications, subject to the condition that the material meets the requirements for envisaged marine application.

18.1 **A separate declaration stating that no asbestos materials are used in the product is to be submitted along with offer and also post manufacturing during equipment delivery.**

19 **Interchangeability:** - Equipment design is to ensure that components and parts having same dimensions and characteristics should be inter-changeable between different units of similar kind, without affecting the specified equipment performance.

20 **Tally and Diagram Plates:** All major components, including fittings such as valves, cocks, levers, gauges, switches, etc., should be provided with suitable identification tallies for appropriate identification. Tally plates shall be in English language and in SI units. All tallies and diagrammatic plates shall be of SS / Chrome plated. Tallies for safety, caution & warning considerations should be in bold black letters on a fluorescent orange background. Diagrammatic plates indicating details of connections are to be provided / affixed near the terminal box of the motor. Size of tally plates, diagrammatic plates, etc. shall conform to International Standards.

20.1 Arrow marking for direction of rotation of motor shall be provided by supplier. This tally shall be made of SS/Chrome plated and properly secured on the motor.

20.2 Motor details such as HP (kW), Starting Current, Full Load Current, rpm, Insulation, Weight, Maker's Name, Sr. No. of Machine, Year of Manufacturing etc. shall be given in the motor tally plate.

20.3 Danger labels in Red colour with white lettering are to be provided on all electrical equipment operating on 150Volts or higher

20.4 Motor winding terminals ending at Connection Box shall have engraved tally number as per the anodised aluminium tally affixed at the rear side of motor connection box.

20.5 The diagram plate, which is fixed on the rear side of the front door, shall have complete wiring diagram of the starter with sub-component identification number. The same identification number shall be engraved on the components fitted on the starter.

20.6 Internal Cable-Cores terminating at the connection terminal strip shall have the same corresponding terminal ferrule no. Fixed / fitted on it.

20.7 Tally of JB/Panel and other equipments internal diagram plate to be prepared by OEM.





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	23 of 66

20.8 Cable Tallies as per approved system drawing to be prepared by OEM.

20.9 Cable tallies should be supply for both the ends.

21 **Instruction Plates:** Instruction plates listing the starting/shut-down procedure and precautions in brief are to be prominently displayed on the equipment. The Instruction plates are to be SS / Chrome plated is to be supplied with a set of instruction plates duly mounted on equipment or supplied loose.

22 **Painting Specification:** Standard painting procedure shall be applicable for suitability for marine environment. Equipment shall be cleaned, degreased and painted with two coats of anticorrosive marine paint & two finish coats. All equipment painting shall conform to CGBR 382 or equivalent International Standards.

23 **Lifting Arrangement:** Equipment components weighing more than 40 kilograms are to be provided with eyebolts/lifting arrangement, for ease of handling/lifting on board the ship or ashore. During transportation/transit of equipment, adequate provisions (such as supports, locking arrangement, jacking, etc.) are to be made for preventing any damage to the equipment & its associated components. Any component requiring special handling shall be clearly marked and appropriate handling instructions shall be provided by equipment supplier. One set of special lifting gear (if any) shall be supplied to shipyard.

24 **Preservation / Conditioning:**

24.1 Equipment supplier is to provide high quality packing for the complete scope of supply along with handling arrangements. The package/container should display clear instructions for stowage, handling, care and accessibility for inspection of equipment preservation condition.

24.2 Equipment shall be supplied with Initial preservation for a period of 12 months for tropical conditions and protected against high humidity. The equipment are to be preserved on delivery as per the standard marine engineering practice. Closing plates/plugs/caps (duly filled with nitrogen gas) are to be provided on all openings.

24.3 For re-preservation requirements, at shipyard or on board ship beyond initial preservation period, suitable provision is to be catered for by equipment supplier. Equipment supplier shall provide re-preservation & upkeep procedure, preservatives/consumables and technical assistance/supervision to the shipyard, as per requirements ( if special equipment/Pumps, hoses, fittings, etc. required shall be brought by the supplier along with them for caring out the preservation on board the ship.

24.4 In the event of storage getting extended beyond a period of 12 months, re-preservation shall be carried out on 6 month extensions basis. The conditions and cost shall be stated in the offer for further two re-preservation of 6 months. Details of the preservative used (oils & greases etc.) and the procedure for de-preservation and re-preservation, in shop or on board the ship, shall be indicated in the offer.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING	SOTR	3045
YARD MDL – 16401/16402/16403/1640 4/16405/16406	REV. NO.	01
MAIN DIESEL ENGINE	DATE	29/05/2024
	PAGE	24 of 66

24.5 Preservation requirement, procedures and schedule for main equipment, OBS and B & D Spares are to be indicated in the offer.

## 25 Packing & Shipping:

25.1 All equipment shall be adequately packed and protected with supports to ensure adequate protection during all methods of transportation. Each unit within a package/container shall be clearly marked in English for identification. The container shall clearly indicate the commodity description with caution marks, weight, size, etc.

25.2 A separate document giving complete details & instruction for storage, preservation, handling & transportation after delivery shall be supplied & a copy must be included with the shipping document. The supplier should indicate the delivery schedule port of embarkation, transport, packing, preservation, insurance etc.

25.3 The instrumentation, sensors and meters etc. which are fitted on the equipment are to be removed from the equipment and shall be staggered delivered according to shipyard schedule in a separate suitable box/packing during STW.

25.4 Following items shall be packed in separate containers/boxes with proper colour coding (with description) & list of their contents in English for their easy identification and traceability:

25.4.1 Deliverables related to Main Equipment (to be marked in green colour).

25.4.2 Deliverables related to Auxiliary Equipment (to be marked in green colour).

25.4.3 Deliverables related to Installation material and Tools related to Main & Auxiliary Equipment (to be marked in green colour).

25.4.4 Commissioning consumables and Tools (to be marked in green colour).

25.4.5 On Board spares and Tools (to be marked in red colour) in SPTA boxes.

25.4.6 Base & Depot Spares (to be marked in red colour).

25.4.7 Documentation (to be marked in blue colour).

25.4.8 The list of actual deliverables against each of the above serials shall be forwarded to shipyards in soft copy (MS Excel format) with required part nos. within one week of finalization of PNC in order to detail them in the purchase order.

25.4.9 Packing list should give further breakup of items, wherever particular item is quantified by set.

## 26 Training :

26.1 The equipment supplier is to impart training, to ship's crew, training & shore maintenance organization; on aspects related to operation, installation, maintenance and repair of the equipment.

26.2 For imparting training, complete training package in hard & soft form (including suitable training material, docket, computer based aids, etc.), is to be provided by the supplier to the participants.

26.3 Training would be conducted by the equipment supplier at Shipyard/ On-board Ship. Training plan will be submitted by the equipment supplier, along with the technical offer.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	25 of 66

Training is required to cover the following aspects (but not limited to):

- (a) Design and installation
- (b) Operation and trouble shooting
- (c) Control & monitoring
- (d) Upkeep and routine maintenance
- (e) On board maintenance including major repairs and overhaul.

#### 26.4 Familiarization Training:

- 26.4.1 Familiarizations on design, installation and operation to be carried out in equipment's manufacturer's workshop / Training School during production of the ship set.
- 26.4.2 Four executives from MDL & four officers from Indian Coast Guard shall attend training on Familiarization on design, installation and operation, at Equipment manufacturer's workshop / Training School during production of the ship set.
- 26.4.3 The participants shall make their own arrangement for traveling and boarding for such training.

27 Security of Information: The information contained in this document is not to be divulged to any other firm/third party without the prior permission of the Indian Coast Guard and MDL. Adequate measures are to be taken to ensure safe custody of this document.

#### 28 Warranty:

28.1 The equipment along with associated auxiliaries/components shall be warranted by the equipment supplier for the stipulated performance for a period of twenty (20) months from the date of delivery of equipment to MDL or twelve (12) months (**36 months for gear box**) after planned delivery date (D) (mentioned in subsequent para) of the ship by shipyard MDL to the Indian Coast Guard, whichever is later. This is to be referred as 'Standard Warranty'.

28.2 During the said period, the equipment supplied shall be warranted against any malfunction, defects, material failure, non-compliance to ordered specifications, sub-optimal performance, design deficiency, poor workmanship and quality. Any expenditure on account of equipment malfunction, repair or supply of spares against warranty defects shall be borne by the equipment supplier. If any defective part is required to be taken back to OEM's factory/works (i.e. importing and re-exporting from Country of origin) for the purpose of service, the entire liability including expenditure towards the same shall be borne by the supplier. The spare parts required / consumed for scheduled servicing & maintenance activities in the period of 'Standard Warranty' shall also be provided by the OEM without any commercial implication.

28.3 The Supplier shall be standard warrants from date of acceptance of the 06 NGOPV by the Shipyard at the designated Indian port or as applicable, that the vessel and the associated equipment and service supplied under this contract and each component used in the manufacture there of shall be free from all types of defects/failures.



	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)  Dockyard Road, Mumbai –400 010.	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
		<b>YARD MDL –</b>	<b>REV. NO.</b>	<b>01</b>
		<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>
		<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>26 of 66</b>

28.4 In case of systems/equipment, which have not completed trials prior delivery, the warranty of that particular system/equipment and service would commence from the day of successful completion of trials. Gear Box will have a warranty of 03 years from the date of acceptance of 06 NGOPV. The Supplier will undertake update (if any) of software's for all equipment up to 5 years from the date of acceptance of the vessel.

28.5 If within the period of warranty, the 06 NGOPV and (or) stores and (or) spares are reported by the Shipyard to have failed to perform as per the specifications, the Supplier shall either replace or rectify the same free of charge, maximum within 15 days of notification of such defect by the Shipyard provided that the goods are used and maintained by the Shipyard as per instructions contained in the operating Manual.

28.6 Warranty of the equipment would be extended by user in log book, Spares and all consumables required for warranty repairs shall be provided free of cost by Supplier. All activities including diagnosis, rectification, calibration, transportation etc, required for making equipment serviceable and available would be Supplier's responsibility.

28.7 The Supplier also undertakes to diagnose, test, adjust, calibrate and repair/replace the goods/equipment arising due to accidents by neglect or misuse by the operator or damage due to transportation of the goods during the warranty period, at the cost mutually agreed to between the Shipyard and the Supplier subject to acceptability by the Shipyard. The Supplier shall intimate the assignable cause of the failures.

28.8 Supplier hereby warrants that necessary service and repair backup during the warranty period, shall be provided by the Supplier and he will ensure that cumulative downtime period for the 06 NGOPV and or the fitted equipment /system equipment does not exceed 45 days of the warranty period. Thereafter, the Shipyard reserves the right to make good the defects at Suppliers risk and cost.

28.9 If the associated equipment and service, spares of 06 NGOPV fails frequently and/or, the cumulative down time exceeds 45 days of the warranty period or a common defect is noticed repeatedly with respect to a particular item/component/sub-component, that complete item/ equipment shall be replaced free of cost by the Supplier within 45 days of receipt of the notification from the Shipyard duly modified/upgraded through design improvement in all equipment supplied/yet to be supplied and Engineering Support Package (ESP) supplied/yet to be supplied. Thereafter, the Shipyard reserves the right to make the defects at Supplier risk and cost.

28.10 In case the complete delivery of the ESP is delayed beyond the period stipulated in this contract, then the Supplier undertakes that the warranty period for the goods/stores shall be extended to that extent.

28.11 The Supplier warrants that the 06 NGOPV, the associated equipment and service supplied will conform to the Temperature and Humidity conditions as mentioned in this document.

28.12 The Supplier agrees to provide back to back warranty of equipment /system or any



	MAZAGON DOCK SHIPBUILDERS LTD. (A Govt. Of India Undertaking)	DESIGN ENGINEERING YARD MDL – 16401/16402/16403/16404/16405/16406	SOTR REV. NO.	3045 01
	Dockyard Road, Mumbai –400 010.	MAIN DIESEL ENGINE	DATE	29/05/2024
			PAGE	27 of 66

other item whose specified warranty by the OEM is more than 12 months and shall extend the same warranty to the Shipyard at no. additional terms and conditions.

28.13 **Extension of Warranty:** Supplier shall mandatorily indicate, in the offer, the annual rate for extended warranty period, in the event of expiry of warranty period as detailed above along with the attendant commercial terms and conditions if any.

29 **Planned Ship Delivery date(D):** The planned date for delivery of the Ships to the Indian Coastguard by MDL are tabulated below:

Ship no.	Yard No.	Planned Delivery date
1	16401	Jul 2027
2	16402	Dec 2027
3	16403	May 2028
4	16404	Oct 2028
5	16405	Mar 2029
6	16406	Aug 2029

30 **Weight Recording / Weight Certificate:** - Weights of all components are to be recorded and a suitable certificate shall be submitted, by the equipment supplier. The designated inspection authorities shall countersign such certificates. Format for weight control data sheet, is placed at **Annexure '3'** of this document.

30.1 Net weight of each component is to be recorded in presence of designated inspection authority and the weight certificate is to be submitted by the equipment supplier, along with equipment supply. Format for weight certificate, is placed at **Annexure '4'** of this document.

30.2 The supplier shall have to submit, reasons for variation between allocated weight and actual/certified weight for each and every item, wherever applicable, to Coast Guard and MDL for their consideration and further necessary action.

31 **Maintenance Management Software:** A Maintenance Management software package for Ship Maintenance, Planned Preventive Maintenance (PPM), Defect Record & Tracking and Maintenance Forecast & Planning as per CG requirements shall be installed and commissioned.

31.1 The software package shall be capable of indicating Maintenance Routines falling due on various equipment fitted on-board and spares requirement, as per OEM promulgated schedule.

31.2 The software will be capable of interlinking on-board spares with actual spares requirement and indicate future requirement to meet Minimum stock level.

31.3 OEM is required to submit the inputs such as routine schedule, spare requirement etc. in the format enclosed at Annexure-9

32 **Technical Assistance:**





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406

MAIN DIESEL ENGINE

SOTR

REV. NO.

DATE

PAGE

3045

01

29/05/2024

28 of 66

32.1 The Supplier shall provide the necessary representative(s) **as and when required**, in carrying out inspection and supervise the work that is done on the equipment, during the following phases:

- (a) Preparation for installation of equipment by shipyard.
- (b) Monitoring of proper equipment preservation during storage.
- (c) On-board erection and alignment.
- (d) Setting to Work (including fitment of latest calibrated instrumentation).
- (e) Harbour Trials.
- (f) Assistance in trouble shooting.
- (g) Customer Sea Trials.
- (h) Post CST equipment Inspections.
- (i) Final Machinery Trials.
- (j) Assistance in operation during equipment guarantee period.

32.2 The supplier shall indicate total cost for executing all technical assistance activities mentioned above, in the price bid. Activity-wise cost break up shall also be given in the price bid, to facilitate the payment on satisfactory completion of the activity.

32.3 Shipyard has to progress on ship construction activities, simultaneously on ships of the coastguard project or on ships of different projects. View this, there shall be every likelihood of clash of requirement of technical assistance. In such eventuality, in order to avoid delays on one ship due to similar work requirement on other ship, supplier shall depute their dedicated separate/independent team of supervisors/specialists for required technical assistance, on the required ships. Rotation of supervisors/specialist amongst the various ships/projects shall be avoided.

32.4 The supplier shall provide checklist for installation, setting to work, HATs & SATs to the shipyards to ensure the completeness of the activities by shipyards in order to avoid waiting period of the supplier specialists.

33 **Receipt Inspection:** Receipt inspection for the major equipment shall be carried out in the presence of OEM rep to verify completeness of the scope of supply and intactness of the supplied equipment. Defective / damaged parts and deficiency, if any, in supply shall be made good by OEM free of cost. OEM shall be intimated the date of receipt inspection.

34 **Price:** Price bid shall include cost of all deliverables and services as mentioned in tender. Break-up in percentage of total quoted cost of main equipment for its various components shall be indicated by the supplier. Non-indigenous equipment Suppliers are to indicate the import content in USD/EURO.

35 **Compliance Matrix:** Para-wise compliance matrix, including paras which are not applicable, as per the technical specifications (contained in this document) shall be submitted by the equipment supplier along with the technical offer, in the format as per Annexure-5 (preferably in excel sheet). The technical offer received without Compliance Matrix shall be liable for rejection.

	MAZAGON DOCK SHIPBUILDERS LTD.	DESIGN ENGINEERING	SOTR	3045
	(A Govt. Of India Undertaking)	YARD MDL – 16401/16402/16403/16404/16405/16406	REV. NO.	01
	Dockyard Road, Mumbai –400 010.	MAIN DIESEL ENGINE	DATE	29/05/2024
			PAGE	29 of 66

**36 Technical Offer as Per Shipyard Tender:** - Technical part of the offer with respect to the equipment and its associated auxiliaries/components/controls, to be submitted by the equipment supplier in comprehensive, systematic and structured manner, as per the requirements mentioned in this document, including the following (but not limited to) Vendor to submit the check list as per Annexure-6 :

- 36.1 Equipment specifications.
- 36.2 Equipment performance data
- 36.3 Characteristics data, curves, efficiency, etc., related to equipment performance
- 36.4 Outline general arrangement drawings of equipment with footprint, main dimensions, weights and mounting arrangement, with recommended maintenance space.
- 36.5 Requirement of Ship services (Power rating, Sea/Fresh water, Compressed Air etc.)
- 36.6 Associated support systems specifications and drawings.
- 36.7 Interface requirements.
- 36.8 Relevant drawings with all views and maintenance envelopes.
- 36.9 Control and monitoring system along with complete list of sensors and instrumentation (in structured manner).
- 36.10 Mounting data/details and characteristics
- 36.11 Structure borne and airborne noise performance levels (in graphical & digital format).
- 36.12 Comprehensive list of binding design documentation in structured manner along with time schedule for submission.
- 36.13 Associated electrical equipment specifications and drawings.
- 36.14 Recommended list of installation & commissioning Consumables, onboard spares, base & depot spares, special tools, test equipment, etc., in systematic manner.
- 36.15 Indigenization plan, work-share, MOU / Definitive Agreement / License agreement, technology transfer, product support, etc.; as applicable.
- 36.16 Training plan
- 36.17 Preliminary quality assurance and test plan. (QAP)
- 36.18 Compliance matrix (Para-wise compliance to tender specifications).
- 36.19 Complete Weight breakdown for major components (excluding & including oil).
- 36.20 Requirement of Greases, Oils etc., with their Indian equivalents.
- 36.21 Proposed plan for technical assistance for installation, preservation and commissioning, trials, etc.
- 36.22 List of main and auxiliary equipment included in the standard scope of supply with NCN (NATO Code Nos.).
- 36.23 List of items required for auxiliary systems (shipboard systems), which are essentially, be fitted for proper functioning of main equipment with NCN. Also indicate any of them, which are not supplied along with main equipment.
- 36.24 List of Instrumentation & Diagram.
- 36.25 Clear demarcation between the scope of supply of firm and that of the yard.
- 36.26 Trial and commissioning time of complete system on board.
- 36.27 Delivery time from receipt of order.
- 36.28 List of special tools, instruments, jigs & fixtures & facilities required for lifting, transporting, aligning, installing and commissioning of main equipment and their auxiliaries.





MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING	SOTR	3045
YARD MDL – 16401/16402/16403/1640 4/16405/16406	REV. NO.	01
MAIN DIESEL ENGINE	DATE	29/05/2024
	PAGE	30 of 66

36.29 Type approval

36.30 The specification relates to design, manufacture, supply & commissioning of System / equipment to be used in Indian Coast Guard Ship.

36.31 Manufactures may be guided by this document to ensure that their products meet the standards of Installation on Indian coast guard ship.

36.32 The drawing & dimensions are for reference purpose only. Vendor to design the equipment based on technical data supplied.

36.33 The offer should be strictly conforming to the details indicated in this specification and in the relevant specifications / drawings / documents (All Latest Issues are to be followed).

36.34 No omission in the Specifications shall relieve the supplier of his responsibility to ascertain these requirements to perform work & furnish material in accordance with codes specified.

36.35 The offer should be complete with all relevant details such as Detailed Technical Specification, Material Specification, Overall Dimensions, Maintenance requirement, Foundation / Installation / Bolting, Storage/ Preservation Details, supported by drawings/documents/data sheets etc.

36.36 Any clarification required regarding Technical Specification / Requisition should be sought before submission of the offer.

36.37 Four copies of technical offer shall be submitted by equipment supplier; in hard and soft form (CD-ROM).

### 37 **INSTRUMENTATION:**

37.1 Safety, control and monitoring devices are to be fitted on equipment as per requirement. All Miscellaneous items are to be fitted as per functional requirement of the system. All piping material with necessary instrument & accessories & Instruments are to be fitted.

37.2 Any other instruments & accessories not listed however are required for satisfactory operation as supplier design shall also be part of scope of supply.

37.3 If applicable, 100mm dia. pressure and vacuum gauges (complete with needle valves, nuts and nipples) and thermometers should be supplied for the machinery equipment under supply as per technical, specification and these should be indicated in the installation drawings for the unit. Pressure gauge cocks should be provided with vent holes.

37.4 All the thermometers should be brass cases. Suitable pockets/sockets should be arranged on the equipment for fitting the pressure gauges and thermometers.

37.5 All the pressure gauges and thermometers should be marked in kg/sq.cm or bar and deg. Celsius respectively. All the pressure gauges and thermometers scale ranges should be selected so that the maximum normal operating pressure and temperature respectively will be approx. 75% of the full-scale range.

37.6 Temperature sensing should have the facility to allow for instrument removal without impairing the integrity of the system.

37.7 Pressure gauges should be provided with valve arrangements to allow for instrument isolation and removal, without impairing the integrity of the system.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	31 of 66


## **SECTION II:** **TECHNICAL SPECIFICATION OF PROPULSION INTEGRATION**

### **1. INTRODUCTION**

- 1.1 This technical specification will cover Design, Manufacture, Inspection, Testing, trials, Commissioning and Packaging & Forwarding of Main Diesel engine fitted on suitable resilient mounts along with all the accessories, starter cum control panel with associated fittings & instruments listed in this specification for its' Satisfactory Operation on board ship and during ship's sea trials & ship cruising.
- 1.2 The Supplier of diesel engine shall provide all information required for integration of the equipment on board the ship for AI and IPMS.
- 1.3 The specification defines coast guard duties and details pertaining to evaluations and testing of the equipment. Manufacturer may be guided by this document to ensure that their product meets the standards of installation on Indian Coast Guard ships.
- 1.4 06 NGOPV for Indian Coast Guard is being constructed by Mazagon Dock Shipbuilders Limited (MDL), Mumbai.
- 1.5 Offered equipment should follow the class notation of: A1 HSC (E) (Special Government Service) +AMS NIBS +ACC, FFV1-NS CS-Ready, HELIDK (SRF) by ABS or equivalent of LRS/DNV/GL/BV/IRS/NK.
- 1.6 The equipment offered in the package shall confirm the IRS and ABS class rules requirement.
- 1.7 Type approved equipment by IACS authority to be offered by the Vendor along with unit certification from ABS & IRS Class both.
- 1.8 The Diesel engine supplier is Propulsion integrator and will be responsible for the integration of Diesel engine, Reduction gear and shafting system along with CPP under supervision of Shipyard.

### **2. SCOPE OF SUPPLY:**

- 2.1 02 Nos Marine Diesel Engines (along with all the auxiliaries) of not less than 9000 KW each complying to IMO Tier II (latest norms) – Technical details at **Section III**
- 2.2 Diesel engine supplier has a responsibility to integrates 02 No's Reduction gear (along with all the auxiliaries) and 02 No's shafting along with stern gear and CPP for propulsion system.

	MAZAGON DOCK SHIPBUILDERS LTD.	DESIGN ENGINEERING	SOTR	3045
	(A Govt. Of India Undertaking)	YARD MDL –	REV. NO.	01
	Dockyard Road, Mumbai –400 010.	16401/16402/16403/16404/16405/16406	DATE	29/05/2024
		MAIN DIESEL ENGINE	PAGE	32 of 66

### 3. RESPONSIBILITY OF INTEGRATOR:

- 3.1 In this case, Diesel Engine supplier will be Propulsion integrator, under supervision of Shipyard
- 3.2 Propulsion integrator shall have the responsibility to integrate the full propulsion train which consists of Main engine, RG and Shafting along with CPP
- 3.3 The Propulsion integrator shall undertake all necessary calculation / Simulation for the satisfactory operation of the entire propulsion train and should get it vetted by the ABS & IRS, and necessary approval of CGHQ.
- 3.4 Back pressure calculation of the exhaust piping will be provided by the integrator based on the 3D-CAD modeling provided by MDL.
- 3.5 Propulsion integrator shall source the relevant design data / details from respective propulsion equipment suppliers. Further relevant design data / specifications are to be provided by Propulsion integrator supplier to shipyard for designing sea water cooling system.
- 3.6 Combinatory curve in different mode shall be provided by the propulsion integrator.
- (a) The **Propulsion integrator Supplier** shall be responsible to co-ordinate with other OEMs of propulsion train (Reduction gear box, shafting with CPP etc.), IPMS vendor to collect / share / exchange the relevant data / technology / information required.
- (b) The **Propulsion integrator Supplier** shall have the responsibility to prepare documents for setting to work and satisfactory completion of HAT / CST / FMT for acceptance of Propulsion **train** by IRS and ABS Class along with ICG. All details / data required shall be sourced from respective OEMs.
- (c) Torsional vibration calculation of the entire propulsion train to be carried out by Diesel engine OEM and same to be review by Propulsion integrator and get vetted by ABS & IRS, and necessary approval of CGHQ.
- (d) Propulsion integrator supplier shall take care of necessary action to overcome while interfacing with the other vendors of the propulsion train.
- (e) Design of holding down arrangement will be shared with Propulsion integrator for review / comments.
- (f) Propulsion system integrator shall finalize and Diesel engine OEM supply Flexible coupling to connect engine shaft to Gear box input shaft. Finalization of flexible coupling, to be with CG approval (Propulsion integrator supplier to liaison with Gear box OEM for getting gear box data / input flange data for finalization of flexible coupling).
- (g) Interface for External Fire Fighting pumps and RG are to be finalized by Propulsion integrator in-consultation with RG & Ext. FIFI OEMs with approval of CGHQ.





**MAZAGON DOCK SHIPBUILDERS  
LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

**DESIGN ENGINEERING**  
**YARD MDL –**  
**16401/16402/16403/1640**  
**4/16405/16406**  
**MAIN DIESEL ENGINE**

<b>SOTR</b>	<b>3045</b>
<b>REV. NO.</b>	<b>01</b>
<b>DATE</b>	<b>29/05/2024</b>
<b>PAGE</b>	<b>33 of 66</b>

- (h) Propulsion integrator Supplier with respective equipment OEM of propulsion train shall to be present during finalization of interface requirement with IPMS.
- (i) Fit bolts between gear box input flange and DE output Flange and gear box output flange to shafting input flange are to be supplied by the RG supplier. Fit bolts to be class approved.
- (j) Respective equipment foundation and jacking bolts are to be supplied by the respective OEMs. Foundation and jacking bolts to be type approved.
- (k) Foundation drawings of propulsion train review / comments by Propulsion integrator supplier.
- (l) Propulsion integrator supplier shall be responsible for interfacing the Main engine, Reduction gear and shafting system along with CPP to meet the specified performance requirements of propulsion train. The comprehensive list of signals from various propulsion equipment (after finalization of gear box and Shafting with CPP OEMs) to be prepared by integrator and the same to be provided during details engineering. The list shall be prepared based on operation and safety of propulsion train and class requirements.
- (m) Propulsion integrator supplier assistance includes presence of skilled technicians for supervision during on-board installation (alignment check, bearing load checking, STW of Diesel engine, test & trial etc.) & STW, HAT, SAT for first ship of the propulsion train on-board shall be provided by integrator Supplier, under supervision of Shipyard.
- (n) Entire propulsion plant including Diesel Engine will be controlled from remote locations through IPMS from MCR, Bridge & Bridge wings. DE LCP shall cater the provision of necessary hardwired and MODBUS Serial Link interface with address for remote control. The details of signals (preliminary) to be provided in the offer and the same will be finalised during detail design.
- (o) EOT cum Propulsion Control Lever along with remote monitoring and control panel for propulsion integration to be supplied by IPMS Supplier and the same will be mounted on IPMS console at Bridge, Bridge Wings and MCR. DE Supplier to provide all necessary data for preparation of DE/Propulsion Plant mimic and necessary parameters, alarms, signals (hard & soft) to be provided to IPMS supplier. EOT to be provided in Engine room also.
- (p) Propulsion integrator supplier is responsible for signal interfacing (Hard wired/Serial link) between Main engine, gear box and shafting along with CPP and IPMS for remote control and monitoring. The interface requirement shall comply system design configuration as per class requirement.





**MAZAGON DOCK SHIPBUILDERS LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

**DESIGN ENGINEERING**  
**YARD MDL –**  
**16401/16402/16403/16404/16405/16406**  
**MAIN DIESEL ENGINE**

**SOTR** 3045  
**REV. NO.** 01  
**DATE** 29/05/2024  
**PAGE** 34 of 66

(q) Installation, HAT & SAT protocol to be submitted by the respective OEMs for the approval of Propulsion integrator supplier and same has vetted by class and with CGHQ approval.

**4. TASK RESPONSIBILITY MATRIX:** Following minimum activities shall be undertaken by propulsion system integrator.

Phase	Task Description	MDL	(VETTING/ APPROVE) BY CLASS	ICG	INTEGRATOR	IPMS	DE	RG	Shafting/ Propeller	Remark
1	Preliminary Statement of Requirements (SOR) for Propulsion System, also called "Baseline Design Specification"	D	--	W	--	--	--	--	--	
1	Model tests with stock propeller, confirmation of rpm vs. Load curves	E	--	W	R	--	--	--	RE	
1	Establish the rpm / pitch schedules to obtain optimum performance & noise characteristics from the propulsion system for specified modes of operation.	FR	A	A	IR	RE	--	-	E	
1	Operating modes, endurance and range calculations.	D	--	A	RE	RE	RE	RE	RE	
*	<b>NOISE AND VIBRATION</b>									
2	Results of Noise and Vibration	D	A	A	R	--	E	E	E	
*	<b>PROPULSION PLANT FOUNDATIONS</b>									
2	Design of propulsion plant seating / foundations / hull structure	D	A	H	R	--	R	R	R	Integrator to review the foundation w.r.t. strength. OEM to review w.r.t. to compatibility for their equipment.
1	<b>GA of Propulsion Plant</b>	D	--	--	R	RE	RE	RE	RE	
1	Engine room arrangement drawings incl. interfaces with the hull structure	D	--	H	RE	RE	RE	RE	RE	
2	Schematic drawings of the propulsion support system (fuel, lub oil, cooling water, air etc.)	D	A	A	FR	RE	IR	IR	IR	
0	<b>MACHINERY PLANT CENTRAL CONTROL SYSTEMS</b>	-			-	-	-	-	-	
2	Procurement specification for IPMS to be evolved from the technical input provided by OEMs.	D	--	A	FR	E	R	R	R	Integrator has to review only propulsion system part.



**MAZAGON DOCK SHIPBUILDERS LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

**DESIGN ENGINEERING**  
**YARD MDL –**  
**16401/16402/16403/16404/16405/16406**  
**MAIN DIESEL ENGINE**

**SOTR** 3045  
**REV. NO.** 01  
**DATE** 29/05/2024  
**PAGE** 35 of 66

2	Layout the architecture of the propulsion control and monitoring system according to the SOTR	RE		A	FR	E	R	R	R	Integrator has to review only propulsion system part.
2	Specification of Electrical Interfaces to all components of propulsion system incl. Propulsion Control System block diagrams	RE	A	H	FR	E	R	R	R	Integrator has to review only propulsion system part.
2	Implement the rpm / pitch schedules (combinatory curves) into IPMS to obtain optimum performance from the engines and propellers for all modes of operation.	RE	A	W	FR	E	R	R	R	
2	Installation drawings for main components of control and monitoring system (electric cabinets)	RE	A	A	R	E	E	E	E	
*	<b>PROPULSION INTERNAL COMBUSTION ENGINES</b>									
2	Propulsion Diesel Engine Specifications incl. load increase / decrease schedule, engine performance diagram etc.	RE	A	A	R	RE	E	RE	RE	
2	Propulsion Diesel Engine Interface Specifications (physical, mechanical, electrical)	RE	A	H	R	RE	E	RE	RE	
2	Installation drawings for diesel engine including mounting system, output coupling and flexible connection elements	RE	A	A	R	-	E	RE	-	
2	Propulsion Diesel Engine support (auxiliary) systems requirements	RE	A	H	R	-	E	-	-	
2	Installation drawings for main components of support system (Auxiliary equipment) of DE	RE	A	A	R	-	E	-	-	
*	<b>PROPULSION REDUCTION GEARS</b>									
2	Propulsion Reduction Gear Interface Specification (physical, mechanical, electrical)	RE	A	H	R	RE	RE	E	RE	
2	Installation drawings for reduction gears including mounting system and flexible connection elements	RE	A	A	R	-	RE	E	RE	
2	Propulsion Reduction Gear support system requirements	RE	A	H	R	-	-	E	-	
2	Installation drawings for main components of support system (Auxiliary equipment) of RG	RE	A	A	R	-	-	E	-	
*	<b>PROPULSION CLUTCHES AND COUPLINGS</b>									
2	DE couplings drawings and engineering data	RE	A	A	R	-	E	RE	-	
2	Reduction Gear, Thrust Bearing, clutches data etc.	RE	A	A	R	RE	RE	E	RE	
*	<b>PROPULSORS</b>									



**MAZAGON DOCK SHIPBUILDERS LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

**DESIGN ENGINEERING**  
**YARD MDL -**  
**16401/16402/16403/16404/16405/16406**  
**MAIN DIESEL ENGINE**

**SOTR** 3045  
**REV. NO.** 01  
**DATE** 29/05/2024  
**PAGE** 36 of 66

2	Shafting, Bearings and CPP specifications	D	A	A	RE	-	-	RE	E	
2	Shafting, Bearings and CPP Interface specification (physical, mechanical, electrical)	RE	A	H	R	RE	RE	RE	E	
2	Propeller design	RE	A	A	R	-	-	-	E	
2	Shafting, bearings and propellers; general arrangement drawings	RE	A	A	R	-	-	-	E	
2	Shafting, Bearings and CPP support system requirements	RE	A	H	R	-	-	-	E	
2	Installation drawings for main components of support system (Auxiliary equipment) of Shafting, Bearings and CPP	RE	A	A	R	-	-	RE	E	
*	<b>INSTALLATION CONTROL DOCUMENTS</b>									
2	Alignment drawing & procedure for propulsion plant installation (Propulsion plant Installation & Alignment procedure for pre-launch activities details including relevant templates for survey and inspection reports sheets with allowed deviations)	A	RE	H	E	-	R	R	R	
2	Compile & update of the Control Documents for Physical, Mechanical & Electrical Interfaces (ICD). Coordination of Interface clarifications.	RE		H	E	RE	RE	RE	RE	
2	Torsional vibration analysis of propulsion system. Establish the mass-elastic & damping model, carry out the calculation and submit a report	RE	A	A	FR	-	E	RE	RE	
2	Exhaust Gas System Diagrams (uptakes)	D	A	A	FR	-	R	-	-	
2	Pressure loss calculation of DE uptakes	D	A	A	E	-	R	-	-	ROUTE WILL BE DEFINED BY MDL. INTEGRATOR TO CALCULATE THE LOSES
2	FAT procedure of DE, RG & SHAFTING	RE	A	A	R	-	E	E	E	
2	Compilation of STW, HAT & SAT procedure	RE	A	A	E	E	E	E	E	All OEMs to provide STW, HAT & SAT procedure for their equipment to Integrator. Integrator to compile a final STW, HAT and SAT document for entire Propulsion



**MAZAGON DOCK SHIPBUILDERS LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

**DESIGN ENGINEERING**  
**YARD MDL –**  
**16401/16402/16403/16404/16405/16406**  
**MAIN DIESEL ENGINE**

**SOTR** 3045  
**REV. NO.** 01  
**DATE** 29/05/2024  
**PAGE** 37 of 66

										system.
2	Operating Instructions for the Local Mode operation	RE	A	A	E	-	E	E	E	All OEMs to provide operating procedure for their equipment to Integrator. Integrator to compile a final operating document for Propulsion system.
3	TRIALS	-			-	-	-	-	-	
3	Supervise the Installation, STW, HAT / SAT FOR PROPULSION SYSTEM OF FIRST SHIP	E	A	A	E	E	E	E	E	MDL will execute Installation, STW, HAT & SAT under the supervision of Integrator and respective OEMs and will offer to Class & ICG for approval.
3	HAT / SAT result analysis for first Ship	RE	A	A	E	R	R	R	R	
Flow of Activity	D → E → IR → R → FR → A → RE									

(RE – Record, A – Approval, E – Execute, R – Review, D – Define / Design, FR – Final review, IR – Initial review, H-Hold(Stage inspection is mandatory, inspection offer and report are to be documented and maintained), W-Witness (Witness the activities performed during execution of a process) ).

**5. TECHNICAL ASSISTANCE:** The Propulsion integrator Supplier shall provide the necessary representative(s) as and when required, in carrying out inspection and supervise the work that is done on the Propulsion integration equipment, during the following phases:

- Preparation for installation, On-board erection and alignment of equipment by shipyard. (30 Man Days)
- Setting to Work (including fitment of latest calibrated instrumentation). (20 Man Days)
- Harbour Trials. (20 Man days)
- Customer Sea Trials (10 Man Days)

5.1 The supplier shall indicate Activity-wise cost break up in the price bid, to facilitate the payment on satisfactory completion of the activity.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	38 of 66

5.2 The above activities shall be completed in provided Mandays against activities. Therefore, propulsion integrator supplier has to ensure judicious utilisation of Mandays. Any additional Mandays required for above mentioned activities shall be provided free of cost.

## 6. INTERFACE MEETINGS:

6.1 During the execution of the contractual commitment and to ensure effective communication between MDL, Class & ICG team, regular design review / interface meetings are required for following activities:

- Review of ship system performance,
- Review of general arrangement drawings,
- During development of ICD document,
- During finalizing of engineering calculations
- During defining of ship's test and trials procedure.

6.2 Minimum 03 meetings shall be required during the project. The integrator will prepare the meeting agenda, interface specification and provisional memorandum of agreement that shall be approved by shipyard before interface meetings.

6.3 Diesel Engine supplier shall be responsible in totality for undertaking integrating/interfacing of Main engine, gearbox and shafting along with its auxiliaries and ancillaries as per detail technical specification and scope of supply brought out in this SOTR and technical details placed as Annexure to this document meeting the propulsion integration requirement including of associated auxiliary systems as per Class notification.

## 7. TRAINING:

7.1 In addition to Para 26.4 of Section – I, the details of training activities are as follows:

- Onboard Maintenance and operation of machinery & equipment for complete crew – Onboard ship / yard promises for 05 weeks.
- Main engine maintenance training for 04 (MDL) + 08 (ICG) executive – OEM promises for 02 weeks.
- Main engine control maintenance training for 04 (MDL) + 08 (ICG) executive – OEM promises for 02 weeks.

7.2 The participants shall make their own arrangement for traveling and boarding for such training.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	39 of 66

### SECTION-III

#### TECHNICAL DETAILS – MAIN DIESEL ENGINE

##### 1. INTRODUCTION:

1.1 Nominated vendors for the supply of Main Engine are as follows:

SR. NO.	MAKE	MODEL
1.	M/s MTU	20V8000M71L
2.	M/s MAN	20V28/33 DSTC

1.2 Followings are the OEM's of Gear Box and Shafting along with CPP recommended by ICG.

SR. NO.	EQUIPMENT / SYSTEM	ICG NOMINATED OEMs
1.	Reduction Gear Box with multiple output for CPP shaft and External Fire-Fighting Pump	1. M/s Triveni Engineering Industries Ltd with Reintjes 2. M/s Elecon 3. M/s Renk 4. M/s Reintjes 5. M/s Flender 6. M/s. ZF Marine. 7. M/s. Brunvoll.
2.	Shafting system along with CPP	1. M/s Wartsila 2. M/s MAN 3. M/s Kongsberg 4. M/s Geeta Engineering with Helseth Kumera/Finnoy 5. M/s Nakashima 6. M/s Schottel. 7. M/s. Brunvoll. 8. M/s. Larsen & Toubro.

##### 2. SCOPE OF SUPPLY:

- Scope of supply will cover Design, Manufacture, Inspection, Testing, trial, Commissioning, Packaging and Forwarding & Satisfactory Operation on board ship for all the equipment's, fittings & instruments listed in this specification during ship trials & ship cruising.
- The manufacturer shall provide all information required for integration of the equipment on board the ship. The equipment shall be designed and constructed so that it can be fully integrated with the subsystem to which it interfaces.



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 40 of 66

- (c) All components shall be compatible in order that the functional performance of the equipment is not degraded as a result of its integration within the system as a whole.
- (d) All interface Connections should be provided with flexible Hose/Bellows. Flexible/Bellows of all the systems will be in supplier scope.
- (e) The list of equipment's to be supplied along with accessories & instruments are as follow:

Sr. No.	Description	Quantity/Ship sets
1.	Diesel Engine - Min 9000kW complying to IMO Tier II and Annexure VI of MARPOL 73/78 mainly consisting of its associated auxiliary systems and resilient mountings with foundation bolts.	02 Sets
2.	Diesel engine flexible coupling with connecting shaft.	02 Sets
3.	Dry type silencer for each engine set along with supports for Silencer along with drain valve	02 Nos.
4.	Expansion bellows (Stainless Steel) to be provided as per the class requirement.	02 Sets
5.	Exhaust hood (01 set per engine)	02 Sets.
6.	Diesel engine driven pumps, for fuel, lube oil, freshwater & seawater.	02 Sets
7.	Header tank for jacket water with all the fittings and counter flanges/coupling.	02 Nos.
8.	Flexible supporting assembly / Mounting brackets with fixed and Sliding supports for Exhaust line from turbocharger to atmosphere.	12 nos Fixed 12 nos Flexible
9.	Duplex fuel filters.	02 Sets
10.	Pre-Heater with control panel as per class rules (if applicable)	02 Sets
11.	L.O. Priming pump & Starter as per class rules (if applicable)	02 Sets
12.	F.O. Priming Pump & Starter as per class rules (if applicable)	02 Sets
13.	Handling & lifting gear (including jigs & fixtures), as applicable	01 No per Project
14.	Heat Exchanger, as applicable	02 Sets
15.	Turning gear motor & starter as per class rules along with pendant control unit with lose cable of requisite length (if applicable).	01 Per Engine



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	41 of 66

16.	Special Tools (if any) required for the installation and maintenance	01 Set
<b>Electrical</b>		
17.	Local Control and monitoring Panel along with cable glands for Diesel Engine as per IRS & ABS Class	01 per Engine
18.	UPS for 30 min for control panel (if applicable).	02 Sets
19.	Sensors & instrumentation for controls & monitoring	02 Sets
20.	CAT / Communication cable of requisite length (if applicable)	500 m (approx.)
21.	Thermocouple cable of requisite length (if applicable)	500 m (approx.)
22.	CAN cable of requisite length (if applicable)	500 m (approx.)
23.	**All ship system mounted sensors/signal transmitters, RTDs, limit/lever switches, encoders etc. which are part of DE System to be supplied by DE supplier (if applicable)	1 Set
24.	Latest version Diagnostic software with permanent validity license (if applicable)	1 Set

**NOTE:**

\*\* List of system mounted sensors to be indicated in the offer along with specifications. Supplier shall submit Green passport document as per IMO resolution A 962(23).

Any other instruments and accessories not listed in this document but required for the satisfactory operation of Diesel engine shall be supplied by the firm.  
All gauges & Instruments shall be calibrated & shall accompany with a calibration certificate

**3. SCOPE OF OFFER: The supplier to supply as a minimum the following information along with the technical offer:**

- (a) Type Approval certificate
- (b) Technical Specification of the equipment's.
- (c) Details of all connections to equipment, Vibration details with pattern no, seat details, flange details etc.
- (d) GA drawing with technical parameters and maintenance envelope of all equipment's, sub-assemblies & accessories.
- (e) P & ID diagram
- (f) Heat dissipation of the Equipment
- (g) Details of other ship services required.
- (h) Tools required for maintenance.





**MAZAGON DOCK SHIPBUILDERS LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
<b>YARD MDL –</b>	<b>REV. NO.</b>	<b>01</b>
<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>
<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>42 of 66</b>

- (i) Recommended onboard and base spares holding (for 2 year from standard warranty and 5 years operation respectively)
- (j) Manufacturers list of spares for installation & Commissioning.
- (k) Requirement of Greases, Oils etc. with their equivalents.
- (l) Proposed factory tests and Inspection plan.
- (m) Proposed preservation plan.
- (n) Clear demarcation between the scope of supply of firm and that of the yard.
- (o) List of equipment required for installation and operation of the equipment and not supplied by the manufacturer.
- (p) List of tools & accessories required for installation & commissioning supplied by OEM
- (q) Proposed Quality Assurance & Quality Inspection Plan.
- (r) Preliminary I/O signal list (hard wired & soft signals through Serial Link)
- (s) Electrical Power supply requirements of each equipment
- (t) Block diagram of electrical equipment indicating inter-unit cabling details and types of cables having bifurcation of yard supplied and OEM supplied cable
- (u) Following information shall be provided along with offer.
  - (i) Wet sump capacity (Max)
  - (ii) Average Lube oil consumption,
  - (iii) Quality of lube oil.
  - (iv) Starting air requirement.
  - (v) SFOC
  - (vi) Sea water requirement etc.

**4. APPLICABLE SPECIFICATIONS:** The following documentation or the latest issue in effect is to form a part of this specification to the extent specified herein, except where a specific issue is indicated. In case of a conflict between the contents of this document and the applicable portions of the reference documents, the contents of this document shall take precedence.

a.	Annexure VI of MARPOL 73/78	Regulation for the prevention of Air Pollution from ships and SOx/NOx technical code
b.	Class Notation	The equipment shall comply the class notation as per SOTR
c.	ISO-3046	ICFN Rating for tropical condition
d.	IMO Tier - II	Diesel Engine

**5. MOUNTING:**

- (a) For equipment to be mounted on ships structure, supplier to provide foundation details / mount details for equipment.
- (b) Vendor to provide details of mounting of equipment with control panel on board ship (Mounting Details Drawing).



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	43 of 66

- (c) Fasteners for mounting equipment on ship structure & mating flanges are to be included in the supplier's scope of Supply.
- (d) All instruments of Diesel engine have to be supplied with necessary mounting arrangement so that the Instrument shall be directly mounted on the piping or in ducting.

## 6. TECHNICAL REQUIREMENTS:

- 6.1 Diesel Engines (Minimum 9000 KW each) to meet power requirement with low fuel consumption, high TBO and complying IMO Tier-II (latest norms).
- 6.2 Engines will have low specific fuel consumption, high MTBO. The MTBO for top overhaul and major overhaul to be specified by the OEM. MTBO for main engine to be not less than 38400Hrs.
- 6.3 The Diesel Engines must be air started, turbocharged, intercooled, direct injection type, capable of being started, controlled, operated and stopped from remote/local position.
- 6.4 Engines shall be Type approved Marine Diesel Engine, four-stroke, pneumatic started, developing power suitable to meet designed speed under tropical conditions. Each engine shall be complete with engine driven pumps for fresh water, sea water, fuel oil and lubricating oil.
- 6.5 Engines shall comply to ISO-3046 rating for tropical condition.
- 6.6 The diesel engines must adhere to controlling limits of NOx and SOx laid out in Annexure VI of MARPOL 73/78 – Regulation for the prevention of Air Pollution from ships and SOx/NOx technical code.
- 6.7 The main engine must be type tested and should have ICFN (100% MCR) rating at tropical conditions as per ISO-3046 for the following applications:

Time	Load
10%	80-100%
20%	70-80%
60%	35-70%
10%	10-35%

- 6.8 92% MCR (ICFN) rating of engines at tropical condition shall be able to achieve the specified max speed of 23 knots at full load displacement.
- 6.9 Each engine shall be capable of being started and stopped from remote/local position i.e., MCR/Engine room. Necessary standard accessories for proper engine operation shall also be provided as per OEM's recommendation.
- 6.10 Engines shall be located in staggered manner in the ship.
- 6.11 One engine exhaust at drive end and second engine exhaust at non drive end shall be finalized during detail engineering.
- 6.12 Main engines shall be installed staggered on the ship at two different compartments. Approximate rake angle is 2 deg and 3.5 deg. respectively. This is tentative in nature and will be finalized during detail engineering.
- 6.13 The technical specification of main engine shall be as per OEM standard meeting Class requirements and will generally consist of the following system:
- 6.14



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	44 of 66

- (a) Engine Power as specified
  - (b) Engine basic design
  - (c) Basic configuration
  - (d) Starting system
  - (e) Fuel system
  - (f) Lube Oil System
  - (g) Cooling System
  - (h) Exhaust System
  - (i) Combustion System
  - (j) Control and Monitoring System.
- 6.15 All the equipment to be supplied to have Indigenous facility for major overhauling.
- 6.16 The product support agency to be specified with correct address/Name/phone and service support team details. The OEM/PAC firm should be willing to comply to DPM/DPP as amended from time to time for repairs/supply spares during the life span of equipment.
- 6.17 Indigenous content in the product supplied and plan for “Make in India” to be indicated.
- 6.18 The firms/OEM should provide equivalent Indigenous lub oil for the equipment/machinery offered. The equivalent indigenous lub oil should be as per CG policy.
- 6.19 The life cycle of the main engines offered with an annual operation of 2500 hrs. to be submitted along with the technical offer. The life cycle cost, overhead/transportation cost if any etc.

## **7. MACHINERY OPERATION, MONITORING AND CONTROL SYSTEM:**

- 7.1 Provision for hard wiring for stopping of Main Engines shall be provided as per Class Rules. Diesel engines shall comply the requirement to fulfill the class notation of the ship.
- 7.2 Diesel engine shall aspirate from engine room supply. Air volume at intake to be provided by the OEM.
- 7.3 The engine will have closed circuit system with their own fresh water, fuel oil, lube oil and sea water pumps.
- 7.4 The engines are to be capable of being controlled locally at the engines (from their LCPs – supplied by the Engine OEM) and remotely from machinery control room (MCR) and wheelhouse through IPMS.
- 7.5 The guaranteed specific fuel / lube oil consumption (SFC) is to be mentioned in the technical offer (with not more than 5% tolerance at maximum rated power) and demonstrated during factory acceptance trials. Specific fuel/ lube oil consumption data and curves at various engine power and speed are to be submitted as part of technical offer.
- 7.6 The machinery should be able to be started, monitored, controlled & stopped from the Local, Remotely from IPMS. The indicative IO list for integration with IPMS to be submitted.
- 7.7 Torsional vibration calculation: Torsional vibration analysis (TVA) of the Diesel engine shall be undertaken by Diesel engine supplier. Torsional & axial vibration



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL --  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	45 of 66

calculation for main diesel engine & high speed coupling is to be approved by Class. TV calculations indicating basic data, duly approved by Class are to be submitted to MDL and ICG. The manufacturer should confirm that the concerned main diesel engine is torsionally safe for specified operation.

- 7.8 Turning gear arrangement shall be provided for alignment, operation & maintenance purposes. The turning gear device shall be engaged only manually when the engine is not running. An interlock shall be provided permitting starting of the engine when turning gear is disengaged and same shall be indicated both locally & in MCR through IPMS.
- 7.9 Each engine shall be delivered with torsional flexible coupling suitable for connecting with gear box to prevent excessive torsional vibration in the shafting and shall absorb relative shock displacement between engine and Gear box. The coupling arrangement shall be capable of transmitting the maximum torque from the Diesel engine and absorbing the relative movement between the engine and the reduction gearbox.
- 7.10 Exhaust line back pressure calculation to be provided and air losses at suction.
- 7.11 Each engine set shall consist of following:
- (a) Control panel.
  - (b) A duplex filter shall be provided on each fuel line of the diesel engines.
  - (c) The engine to be supplied with inbuilt starting air system which shall be connected to ships compressed air system of 30 kg/cm<sup>2</sup>. Min & Max air consumption per normal start & cold start is required to be furnished by OEM along with technical offer. Any requirement of LP/HP air required for main engine control/other requirements apart from engine starting to be specified.
  - (d) The engine to be supplied with its own inbuilt, closed lube oil system with engine driven lube oil pump directly coupled to the engine. Engine lube oil system design should take care of priming/pre-lubrication of the engine during starting & stopping. The requirement of pre-heating shall be provided as per class rule.
  - (e) The engine to be supplied with its own inbuilt, closed fresh water system with engine driven FW pump directly coupled to the engine.
  - (f) Safety alarm & trip be included for high Fresh water temperatures. The fresh water system must be provided with the expansion tank. Expansion tank with required control and monitoring instruments to be provided by OEM. Recommended coolant additives and mix ratio to be indicated.
  - (g) Seawater cooling system to be supplied with engine driven seawater pump with capacity to cool engine system.
  - (h) Each engine to be fitted with its own inbuilt fuel system along with pumps.
  - (i) Engine manufacturer shall supply expansion bellows & silencer as per class requirement (complete with mating flanges & fasteners, as required). Complete information on the exhaust gas flow and temperature shall be indicated by OEM.
  - (j) Engine in built systems & engine modules shall be provided with bellows & flexible hoses as required to take care of the engine vibrations. OEM is to



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	46 of 66

supply all counter flanges, fasters, gaskets / fittings for all utility systems which are required to be interfaced with ship's system.

- (k) Electronic local control panel including Start / Stop facility and continuous operation, complete functionality for all possible operating conditions (i.e. Alarms, Warnings, Interlocks and Trips etc.) are to be provided by OEM. Additionally, remote control capability to Start / Stop facility and continuous operation should be provided through serial links signal for IPMS as per the class requirement.
- (l) Pre heater Start/stop with auto-manual mode and auto temperature based cut-off.
- (m) Low lub oil pressure alarm w.r.t various engine RPM to be indicated as applicable

#### **8. LOCAL CONTROL & MONITORING PANEL (LCP):**

- (a) LCP shall be designed, constructed & facilitated as per class rules.
- (b) LCP shall be capable of providing necessary control and monitoring of parameters along with system safety, protection and interlocks.
- (c) LCP shall be comprised of latest technology PLC, HMI and Engine Control System.
- (d) Provision for interfacing all engine mounted RTDs, Pressure Transmitters and other sensors shall be available in LCP.
- (e) Ship is equipped with IPMS System for remote control and monitoring of entire propulsion plant including Diesel Engine. LCP shall have provision of all necessary hardwired signals in required forms (i.e. DI / DO / AI / AO etc.as applicable) and soft signals through Modbus Serial Link to interface with IPMS. Preliminary signal list to be provided in the offer however the list will be finalised with IPMS Supplier during detail design.
- (f) Ship is equipped with Artificial Intelligence Based Predictive Maintenance System. Diesel Engine LCP shall have provision of Modbus serial link for real time engine parameter data to AI System. Engine manuals and maintenance related data to be provided to AI supplier for making AI Based Predictive Maintenance system more effective.
- (g) Ship is having notation of DP-1 System therefore provision of all necessary signal interface through hardwired and/or Modbus serial link (as applicable) to be



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	47 of 66

provided in DE LCP. The same will be finalised with DP System supplier during detail design.

- (h) Supplier to provide list of hardwired signals and soft signals in Modbus TCP/IP format.
- (i) All necessary indication lamps, push buttons and Emergency Switch along with Audio-Visual alarm facility shall be provided as per class requirement and OEM recommendation.
- (j) Necessary control and indication of priming pump & Preheater (as applicable) to be provided on LCP.
- (k) Cable entry will be from bottom and removable gland plate shall be provided with suitable cable glands lose.
- (l) Earthing bolts, vibration mounts shall be provided with LCP.
- (m) Necessary cable glands, Lugs are to be provided.
- (n) Paint shade shall be as per class rules.
- (o) Enclosure shall be drip proof IP-44 for machinery spaces.
- (p) Any special cables such as CAT 7, CAN cable, Thermocouple cable etc. shall be included in the scope of supply. Length to be assessed from the location data provided by Yard. Other power and control cables will be catered by Yard.

#### 9. **MAIN FUNCTION OF LCP:**

- (a) Monitoring of engine and auxiliary system parameters. Digital display for exhaust gas temperature with selector switch for temperature after each cylinder and turbocharger with signal for remote reading to be provided.
- (b) Control of engine and its auxiliary equipment.
- (c) Speed governing of engine including normal and emergency loading.
- (d) Engine safety protections.
- (e) Priming pump Start / Stop.
- (f) Preheater control/monitoring
- (g) Local / Remote control selection.
- (h) Local monitoring of important engine parameters such as Fresh water temperature, Lube oil pressure, Fuel oil pressure, Exhaust temperature, Engine speed etc.
- (i) Provision of Audio-Visual alarm as per class requirement.
- (j) Provide alarms and control signals to IPMS system.
- (k) Provide interface signals to other propulsion equipment (GB & CPP) considering operational requirement and safety of the propulsion plant.

9.1 Facilities to be provided on LCP front door (indicative list to be finalised as per class and OEM recommendation):



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

DESIGN ENGINEERING  
YARD MDL –  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	48 of 66

- (a) High resolution HMI display for indicating the engine control parameters and status.
- (b) Hour counter
- (c) LO temperature
- (d) Fresh water temperature
- (e) Local/ Remote selector switch
- (f) Provision for Engine Speed raise/ Lower.
- (g) Emergency stop button.
- (h) Safety reset button
- (i) Start & Stop button.
- (j) Engine speed/RPM indication.
- (k) Priming pump Start & Stop.

**10. ENGINE CONTROLS:** Following parameters should be displayed at LCP & to be interfaced with IPMS .The list is indicative and subjected to change based on OEM recommendations and class rule.

- (a) Start and stop of DE
- (b) Speed increase/decrease
- (c) Emergency stop
- (d) All functional monitoring parameters of Main Diesel engine
- (e) Common audio visual alarm display
- (f) Safeties override: Only contact is available in LCP for activation from remote station.
- (g) RPM indicator
- (h) Interlock indication
- (i) Common audio/ visual Trip indication
- (j) Ready to start indication
- (k) Safeties reset.
- (l) Safety stops as per class rules for Diesel Engines as well as interfaced equipment's.
- (m) Automatic sequence for priming pump

**11. INSTRUMENTATION/ ALARM/ TRIPS/ INTERLOCKS:** Instruments/alarms/trips etc. shall be provided for Main Engines, as per OEMs recommendations meeting Class requirements and Class notation of the ship. List of start interlock to be indicated by the OEM

	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)  Dockyard Road, Mumbai -400 010.	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
		<b>YARD MDL -</b>	<b>REV. NO.</b>	<b>01</b>
		<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>
		<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>49 of 66</b>

## Annexure "1"

### GENERAL POINT FOR MOTORS AND STARTERS

#### 1. Motors.

- (a) Motors shall be suitable for marine use and conform to latest classification rules of American Bureau of Shipping (ABS) / Indian Register of Shipping classification requirements.
- (b) Motors shall be of standard squirrel cage continuous rated induction type.
- (c) All Motors including Fractional HP motors shall be suitable for 415 Volts, 3 phase, 50 Hz AC supply.
- (d) All Motors shall have class 'F' insulation and totally enclosed with minimum protection of IP-44.
- (e) Motors fitted on the Weather Deck shall be of IP-56 and shall be provided with anti-condensation heaters.
- (f) All motors of 50HP/37.5 KW and above shall be provided with space heaters.
- (g) Interlock is to be provided on starter for switching off the space heater when the motor is switched ON.
- (h) All motors weighing 20 Kgs, and above shall be provided with lifting eyebolts.
- (i) Name plate in English made from engraved brass(black) on weather deck and anodized aluminium (black) in other compartments, indicating motor rated starting current, full load current, rpm, class of insulation, rated voltage, rated running current, number of phases, number of poles and frequency shall be provided.

#### 2. Cable Connections.

- (a) The electric cables shall enter the terminal box on the motor through glands, cable glands to be supplied alongwith the motor.
- (b) Crippage distance of 20mm space for connecting the cables inside the terminal box should be provided.

#### 3. General.







MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	50 of 66

- (a) All motors of 13.5 HP/10 KW & above shall be provided start-Delta Starters or soft starters.
- (b) Motors below 13.5 HP/10 KW shall be provided with direct on-line starters.
- (c) Fractional HP motors shall be provided with suitable MCCBS/MCBs only.
- (d) Starters to have current protection.
- (e) Starters shall be provided with under voltage protection for motors above/ HP.

#### 4. Electrical Supply.

- (a) The starter shall be suitable for 415 Volts, 3 Phase, 50Hz Ac supply.
- (b) The starter shall be provided with Triple Pole Isolator Rotary type incomer.
- (c) MCB/ MCCB.
- (d) ON and OFF Push Buttons.
- (e) Control fuses.
- (f) Motor 'ON' LED indication for Local and remote(As applicable).
- (g) Provision for Auto ON/OFF facility(As applicable).
- (h) Electronic external/separate single phasing preventer to be provided to protect all the three phases of the motors rates 13.5 HP/10KW and above.
- (j) Provision for remote ON-OFF Facility.
- (k) Spare NO/NC contacts for interfacing as required to be provided.
- (l) KED indications with tallies for the following fault condition to be provided.
- (m) Single phasing.
- (n) Overload.
- (p) Thermister Over Heating, if applicable.
- (q) Contactor with two potential free contacts(spare).



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR	3045
REV. NO.	01
DATE	29/05/2024
PAGE	51 of 66

- (r) Timer applicable.
- (s) Over Load Relay (85 to 150%).
- (t) Provision of connecting anti-condensation heater/ space heater.

6. **Thermister and overload Protection.**

- (a) The motor thermal protection system in the starter must detect the abnormal rise in temperature by means of positive temperature co-efficient thermistors (PTCT). Motor should trip due to rise in temperature.
- (b) Timer.
- (c) It should have wide operating range, repeated accuracy and wide time setting.
- (d) Electronic timers should be provided for Star-Delta application.
- (e) Thermal timers to be provided for over lead protection.

7. **Mechanical Construction.**

- (a) The motor starter panel shall be made of 14 SWG Aluminium construction conforming to (A5083 Hill or H 112 or H 116) or (A5086 Hill or H 112 or H 116) or 16 SWG MS Sheet Steel conforming to IS-2026. The panel and assemblies are to be reinforced to withstand the mechanical, electrical (Magnetic) and thermal stresses likely to be encountered in service and are to be protected against corrosion. The panel to be power coated and of dead front type.
- (b) Control Panel fitted on the weather deck shall be made of non-magnetic 16 SWG mat finish stainless steel conforming to IS-316 with IP-56 protection.
- (c) The control panel shall be suitable for bulkheads/in-built eqpt mounting with necessary bolts, nuts, washers, spring - vibration mount, screw less terminals etc.
- (d) The panel shall be provided with single hinged door with efficient locking device and door stoppers with Neoprene gasket all around. It shall be suitable for front side maintenance support services.
- (e) The bottom plate shall be of removable type for cable entry through cable glands.

	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>	
		<b>YARD MDL –</b> <b>16401/16402/16403/16404/16405/16406</b>	<b>REV. NO.</b>	<b>01</b>	
	<b>Dockyard Road, Mumbai –400 010.</b>	<b>MAIN DIESEL ENGINE</b>	<b>DATE</b>	<b>29/05/2024</b>	
			<b>PAGE</b>	<b>52 of 66</b>	

(f) Size of panel to be as small as possible considering space constrains on ship.

#### 8. Cable Connections.

(a) The electric cable shall enter the panel from bottom through glands, cable size will be indicated by MDL for supply of cable glands.

(b) The screw less connecting terminals shall be positioned at the bottom of the panel, with all the internal wiring terminated on one side.

(c) Crippage distance of 20mm space for connecting the cables inside the panel should be provided.

(d) 10% spare terminals to be provided.

(e) All electrical supports inside the starter panel shall be of high quality and moisture resistant materials. The contact surfaces and studs of all devices, to which electrical connections are made, shall be tinned.

#### 9. Internal Wiring.

(a) The Internal wiring shall be made by using LFH type copper multi-stranded conductor flexible cables of adequate rating with minimum 1.5 sq. mm. size and has to be neatly dressed and bunched.

(b) All control and auxiliary wirings shall be provided with numbered ferrules at both the ends for easy identification.


(c) A laminated circuit diagram plate to be provided inside the panel at appropriate place. Suitable earthing to be provided for earthing the panel with the ship hull.

#### 10. Name Plate.

(a) Name plate in English made from anodized aluminium (black) shall be provided for all devices in the panel to identify their function.

(b) Component tallies shall be provided for all the components inside the starter panel.



	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>	
		<b>YARD MDL –</b> <b>16401/16402/16403/16404/16405/16406</b>	<b>REV. NO.</b>	<b>01</b>	
	<b>Dockyard Road, Mumbai –400 010.</b>	<b>MAIN DIESEL ENGINE</b>	<b>DATE</b>	<b>29/05/2024</b>	
			<b>PAGE</b>	<b>53 of 66</b>	

(c) Operating voltage tally shall be provided on the front top. Operating voltage tally shall be in red letters.

11. **Painting Scheme.**

(a) Starter Panel to be painted with Polyster power coating of RAL-7032 paint.

12. **Spares.**

(a) Standard spares for unrestricted service meeting the classification should be included in the scope of supply and the list of such spares with Part/Pattern number and quantity in numbers are to be furnished in the offer. These spares are to be supplied as a part of the equipment.

13. **Binding Drawings/Documentation.**

(a) General arrangement Drg. Of Motors and Starters including weight and dimension.

(b) Internal Wiring Diagram.

(c) Calibration Certificate for timers, Thermisters and Overload relays as applicable.

14. **Trials.**

(a) Acceptance of Motors and Starters will be Subject to Satisfactory Results of Performance tests and routine tests. The tests data offered during Performance tests of Motors in Factory Premises to be documented and forwarded to MDL, as part of the Documentation.

(b) Tables of Relay Ranges, Fuses, MCBs, MCCB, Timers & SPP for Motor Protection.







**MAZAGON DOCK SHIPBUILDERS LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

**DESIGN ENGINEERING**  
YARD MDL -  
16401/16402/16403/16404/16405/16406  
MAIN DIESEL ENGINE

**SOTR** 3045  
**REV. NO.** 01  
**DATE** 29/05/2024  
**PAGE** 55 of 66

**Annexure "3"**

**WEIGHT CONTROL DATA SHEET**

<b>EQUIPMENT DESCRIPTION</b>		<b>EQUIPMENT NO.</b>	
<b>COMPARTMENT</b>		<b>LOCATION</b>	


**SWBD :**

TOLERANCE CODE   
  PRELIMINARY EST.   
  DESIGN EST.   
  M.T.O (CALC)   
  WEIGHED   
  TOLERANCE ± %

**1. WEIGHT (Kg.)**

(a)	DRY	Kg ±	%
(b)	FLUID	Kg ±	%
(c)	OPERATING	Kg ±	%
(d)	TEST	Kg ±	%
(e)	TOTAL	Kg ±	%

**2. EQUIPMENT DIMENSIONAL DATA (mm) & Co-ordinates of CoG**

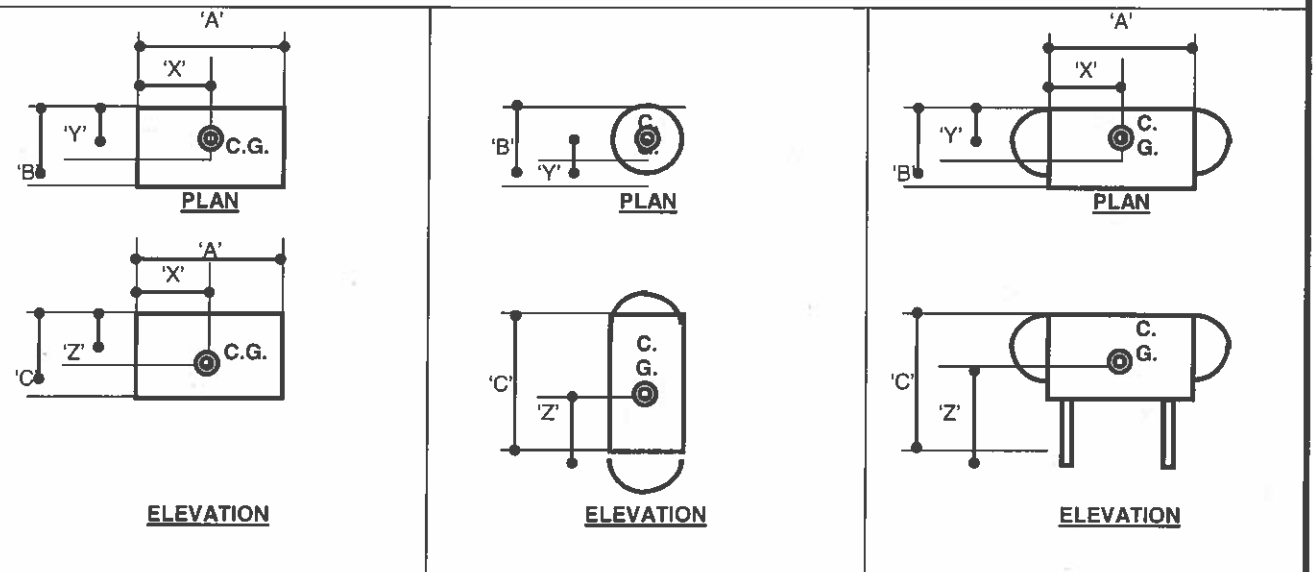

OVERALL SIZE		CENTRE OF GRAVITY	
'A'		'X'	
'B'		'Y'	
'C'		'Z'	

**NOTE :**

- ALL OFFERS SHALL INCLUDE THIS DATA SHEET DULY FILLED IN BY THE SUPPLIER (SIGNED, DATED & SEAL AFFIXED).
- ALL FINISHED ITEMS SHALL BE WEIGHED & A CERTIFICATE SHALL BE PROVIDED AS PER ATTACHED SHEET.
- SEPARATE SHEETS SHALL BE COMPLETED FOR EACH INSTALLED EQUIPMENT.
- ORIGIN OF 'X', 'Y' AND 'Z' TO BE INDICIATED.

**SUPPLIER'S SEAL**

**SUPPLIER'S SIGNATURE & DATE**



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 56 of 66

**Annexure "4"**

**WEIGHT CERTIFICATE**

**EQUIPMENT DESCRIPTION:**

**EQUIPMENT NO. :**

The form shall be completed by Supplier & shall be supplied along with the equipment.

**SUPPLIER'S  
NAME**

**Ref. Drg. No.**

**ADDRESS**

**Part No.**

**TELEPHONE NO.**

**ORDER NO.**

**EQPT. NO.**

**METHOD OF WEIGHING:**

Supplier shall prescribe Method & Equipment Used:

**DATE OF LAST  
CALIBRATION**

**SPECIFIED ACCURACY  
REQUIREMENT**

**NOTE :-**

**RESULT OF WEIGHING TOTAL EQUIPMENT DRY WEIGHT**

(Excluding packing, temporary protection etc.)

**ALLOCATED WEIGHT**

(Weight estimate agreed by purchaser  
and supplier based on order specs).

**REASONS FOR VARIATION BETWEEN ALLOCATED WEIGHT AND CERTIFIED WEIGHT:**

**WEIGHING ADDRESS:**

**WITNESSED BY**

**FOR SUPPLIER**

**FOR PURCHASER**

**Representative**

**Representative**

**Date:**

**Signature / Date & Seal**

**Signature/Date & Seal**





	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)	<b>DESIGN ENGINEERING</b>	<b>SOTR</b>	<b>3045</b>
		<b>YARD MDL –</b>	<b>REV. NO.</b>	<b>01</b>
	<b>16401/16402/16403/16404/16405/16406</b>	<b>DATE</b>	<b>29/05/2024</b>	
	<b>Dockyard Road, Mumbai –400 010.</b>	<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b>	<b>58 of 66</b>

### ANNEXURE “6”

#### Checklist with offer:

- 1) The supplier to supply as a minimum the following information along with his technical offer:
- 2) Technical Specification of the equipment's.
- 3) Details of all connections to equipment, Vibration details with pattern no, seat details, flange details etc.
- 4) GA drawing of all equipment's, sub-assemblies & accessories.
- 5) Technical parameters of all equipment & accessories.
- 6) Outline drawings of the equipment indicating overall dimensions, C.G. and Maintenance envelope.
- 7) P & ID and E&ID diagram.
- 8) Complete Weight breakdown (excluding & including oil).
- 9) Heat dissipation of the Equipment
- 10) Details of other ship services required.
- 11) Tools required for maintenance.
- 12) Recommended onboard and base spares holding (for 2 year and 5 years operation respectively)
- 13) Manufacturers list of spares for installation & Commissioning.
- 14) Instrumentation List & Diagram.
- 15) Brief on integration of Control System with ship's Integrated Control System.
- 16) Inter-unit cabling diagram clearly indicating each unit/sub-unit and types of cables being used for the system.
- 17) Requirement of Greases, Oils etc., with their equivalents.
- 18) Proposed factory tests and Inspection plan.
- 19) Proposed preservation plan.
- 20) Delivery time from receipt of order.
- 21) Clear demarcation between the scope of supply of firm and that of the yard.
- 22) List of equipment required for installation and operation of the equipment and not supplied by the manufacturer.
- 23) Trial and commissioning time of complete system on board.
- 24) Special tools and test equipment to be supplied for on board maintenance.
- 25) List of main equipment included in the standard scope of supply.
- 26) List of accessories inclusive / not inclusive in the standard scope of supply.
- 27) List of tools & accessories required for installation & commissioning
- 28) Reliability parameters.
- 29) User list of similar equipment supplied by the manufacturer.
- 30) Details of standard and optional factory tests.



**MAZAGON DOCK SHIPBUILDERS  
LTD.**  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai –400 010.

**DESIGN ENGINEERING**  
**YARD MDL –**  
**16401/16402/16403/1640**  
**4/16405/16406**  
**MAIN DIESEL ENGINE**

<b>SOTR</b>	<b>3045</b>
<b>REV. NO.</b>	<b>01</b>
<b>DATE</b>	<b>29/05/2024</b>
<b>PAGE</b>	<b>59 of 66</b>

### **MOTOR:**

- 1) Service
- 2) Type of motor
- 3) Power supply – Voltage, Frequency & No. of phases
- 4) Output of motor
- 5) RPM (No load and full load)
- 6) No. of poles
- 7) Full load current
- 8) Starting current
- 9) Starting torque when the ambient temp. is 30oC
- 10) Pull out torque
- 11) Run up time
- 12) Motor Enclosure & Protection provided
- 13) Noise & Vibration level
- 14) Class of insulation
- 15) Method of starting – Remote, local facility & indication
- 16) Type of winding
- 17) Weight of the motor
- 18) Over all dimensions of the motor
- 19) Terminal connection detail
- 20) Efficiency at 100%, 75% & 50%
- 21) Power Factor at 100%, 75% load
- 22) Direction of rotation
- 23) Shaft material
- 24) Lifting arrangement of motor
- 25) Whether RIS unit provided
- 26) Whether heaters are fitted and supply voltage to heater is indicated
- 27) Whether heater supply required
- 28) Frame size
- 29) Method of mounting
- 30) Serial no of machine
- 31) Duty cycle (period of output)
- 32) Particulars of shaft end
- 33) Heat dissipation

### **STARTER:**

- 1) Service
- 2) Type of starter
- 3) Voltage, frequency and No. of phases
- 4) Protection provided
- 5) Enclosure
- 6) Vibration level
- 7) Method of mounting and requirement of mounts





**MAZAGON DOCK SHIPBUILDERS  
LTD.**

(A Govt. Of India Undertaking)

Dockyard Road, Mumbai -400 010.

**DESIGN ENGINEERING**

**YARD MDL -**

**16401/16402/16403/1640  
4/16405/16406**

**MAIN DIESEL ENGINE**

**SOTR**

**3045**

**REV. NO.**

**01**


**DATE**

**29/05/2024**

**PAGE**

**60 of 66**

- 8) Method of starting, remote and local control
- 9) Facilities and indication provided.
- 10) Weight and overall dimensions of the equipment
- 11) Rating of the contactors
- 12) Spares provided
- 13) Class of insulation

	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)  Dockyard Road, Mumbai -400 010.	<b>DESIGN ENGINEERING</b> <b>YARD MDL –</b> <b>16401/16402/16403/16404/16405/16406</b>	<b>SOTR</b> 3045 <b>REV. NO.</b> 01 <b>DATE</b> 29/05/2024
		<b>MAIN DIESEL ENGINE</b>	<b>PAGE</b> 61 of 66

**Annexure '7'**

**MANUFACTURER'S RECOMMENDED LIST OF SPARES TOOLS AND SOFTWARE (MRL-OBS)**

**VESSEL/ EQUIPMENT: 06 NGOPV**

Sr No	Eqpt Part No./ Model no./SI No.	Eqpt Description	OEM Name	Vendor Name	Illustrated Spare Part List (ISPL) Reference/ Part No. of	Desc of Spare	Country of Origin	Unit Price	Seller Order No. & Date	Currency Code	Total Qty	VED* Category	Recommended scale for C6 NGOPV	Remarks

**MANUFACTURER'S RECOMMENDED LIST OF SPARES (MRL-B&D)**

**VESSEL/ EQUIPMENT: 06 NGOPV**

Ser No	Eqpt Part No./ Model no./SI No.	Eqpt Description	OEM Name	Vendor Name	Illustrated Spare Part List (ISPL) Reference/ Part No. of Spare	Desc of Spare	Country of Origin	Unit Price	Seller Order No. & Date	Currency Code	Total Qty	VED* Category	Recommended scale for 06 NGOPV	Remarks

\*VED- VITAL / ESSENTIAL/ DESIRABLE analysis of spares to be carried out by OEM prior to submission to the Buyer.

Original Equipment Manufacturer (OEM): \_\_\_\_\_ (Complete Address)

1. Data regarding maintenance spares/stores like lubricants, sealing compound, gases should be given separately giving source of supply.



	<b>MAZAGON DOCK SHIPBUILDERS LTD.</b> (A Govt. Of India Undertaking)	<b>DESIGN ENGINEERING</b> <b>YARD MDL –</b> <b>16401/16402/16403/16404/16405/16406</b>	<b>SOTR</b> <b>REV. NO.</b>	<b>3045</b> <b>01</b>
	Dockyard Road, Mumbai –400 010.	<b>MAIN DIESEL ENGINE</b>	<b>DATE</b> <b>PAGE</b>	<b>29/05/2024</b> <b>62 of 66</b>

2. Data furnished as OBD and B&D should also include software backups, as applicable
3. In “Remarks” column following information (if applicable) be given:-
  - a) If an item has a shelf/operational life it be marked as ‘G’ and life be indicated
  - b) Matching set of components be indicated.
  - c) Item which can be locally manufactured in India should be marked ‘LM’.
  - d) Items which cannot be manufactured in India due to sophisticated design/ technology may be marked as ‘SI’ (Special Item).
  - e) If a component/assembly is common to other similar equipment offered by the OEM earlier, these should be marked ‘CM’ and Name of the equipment be indicated.
4. OBS and B&D spares list should be drawn out of the ‘Part List’ of the equipment, which should be separately given as part of Technical Manuals.
5. If the main equipment consists of other equipment, then OBS and B&D spares list should be prepared for them under proper heads. OBS and B&D spares list is to be prepared as per the maintenance concept of the customer.
6. Items provided along with the equipment as spares should also be included in OBS and B&D list
7. Modules/ Shop Replaceable Unit (SRU) / assemblies should be listed and their components should be included under them so as to relate each item of spare to their module / SRO / assembly.
8. OBS and B&D list for test equipment should also be provided on the similar format.
9. Cost to be indicated in Price bid only.




**MAZAGON DOCK SHIPBUILDERS LTD.**  
 (A Govt. Of India Undertaking)  
 Dockyard Road, Mumbai -400 010.

**DESIGN ENGINEERING**  
**YARD MDL -**  
**16401/16402/16403/1640**  
**4/16405/16406**  
**MAIN DIESEL ENGINE**

**SOTR** 3045  
**REV. NO.** 01  
**DATE** 29/05/2024  
**PAGE** 63 of 66

**Annexure "8"**  
**REFERENCE DRAWING FOR SPTA BOX**

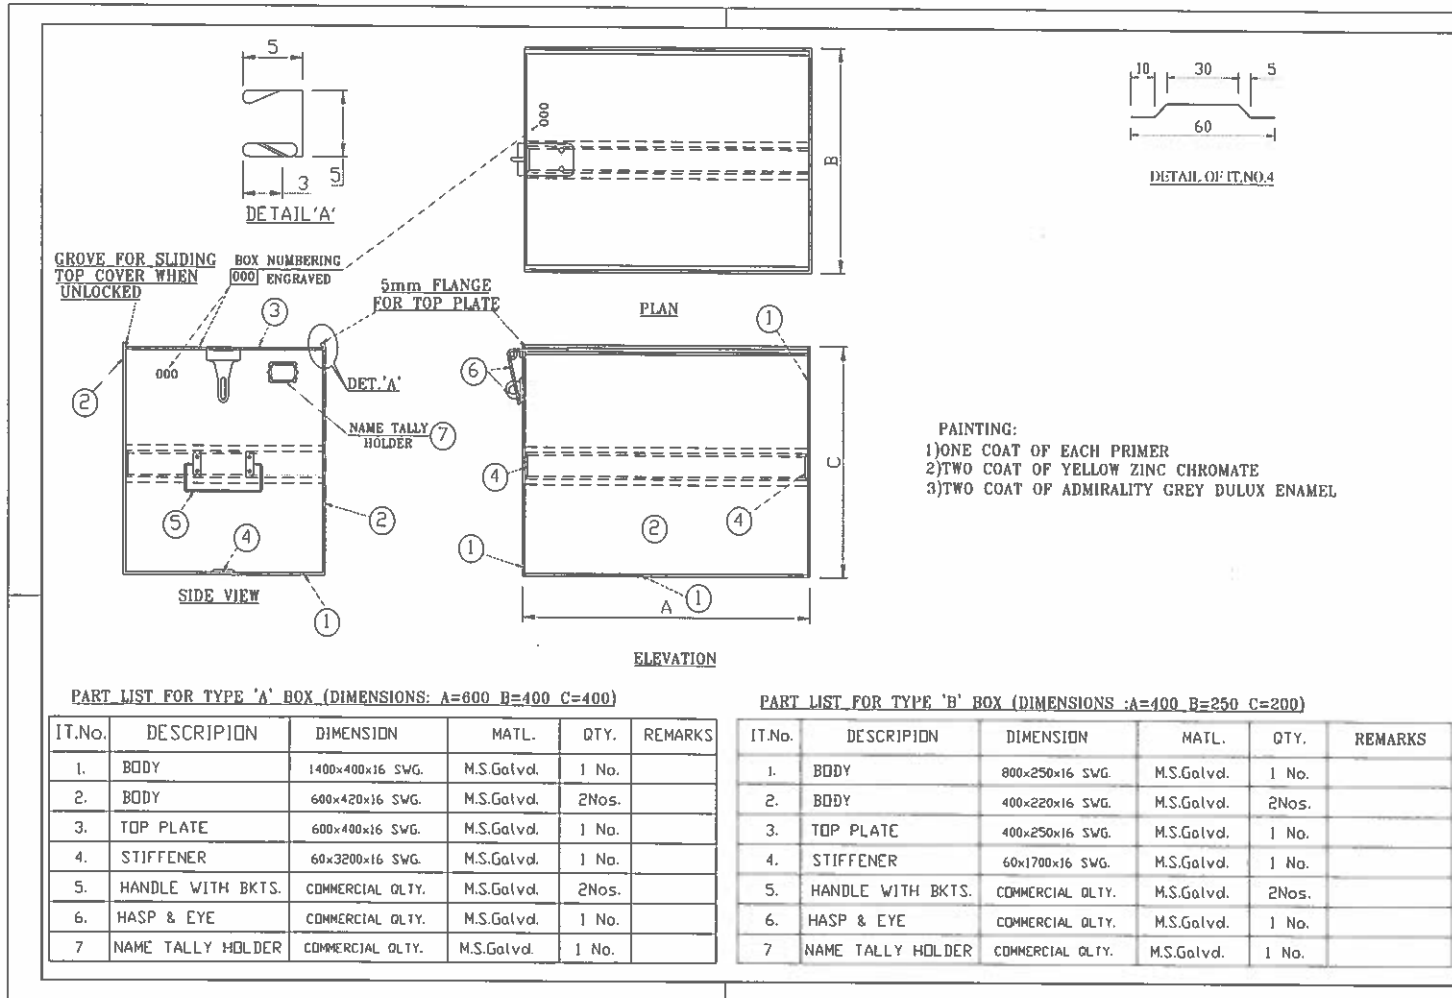



MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING  
YARD MDL -  
16401/16402/16403/1640  
4/16405/16406  
MAIN DIESEL ENGINE

SOTR 3045  
REV. NO. 01  
DATE 29/05/2024  
PAGE 64 of 66

### Annexure "9"

#### Maintenance Management Software (MMS) format

Maintenance Interval Schedule	Tasks to be performed	Detailed task description with corresponding equipment image in PDF/ jpeg format	Spares required for performing the tasks			Tools required
			Description	Quantity	Dimension/ weight	
Example:						
Initial 500 Hours	Aux water pump inspect	Check following components for wear and damage 1)Bearings 2)Impeller 3)Seal	Nil	Nil	Nil	1) 1U-7546 chain wrench 2)Engine standard tool kit
	Battery electrolyte level check	1)remove filler caps 2)Add only distilled water if necessary 3)Keep the battery clean 4)clean the terminals with fine grade of sandpaper if required.	Distilled Water	Nil	Nil	
	Engine oil filter change	1)Remove oil filter with 1U-7546 chain wrench 2)Clean sealing surface of filter mounting. 3)Apply clean engine oil to new oil filter gasket 4) intall the new oil filter. Tighten the filter until filter gasket contacts the base. Do no overtight the oil filter.	2) Oil filter gasket	1	Nil	

	MAZAGON DOCK SHIPBUILDERS LTD.	DESIGN ENGINEERING	SOTR	3045
	(A Govt. Of India Undertaking)	YARD MDL – 16401/16402/16403/16404/16405/16406	REV. NO.	01
	Dockyard Road, Mumbai –400 010.	MAIN DIESEL ENGINE	DATE	29/05/2024
			PAGE	65 of 66

**Annexure "10"**

**TIMELINES FOR TASKS AND DELIVERABLES (DURATIONS) OF MAIN ENGINE WITH PROPULSION INTEGRATION**

FOR MDL				
	Activity	Yard 16101		Duration (Weeks)
		From	To	
	<b>Placement of order</b>	P		
1	Binding Data	P	P+3	03
2	QAP	P	P+4	04
3	Manufacturing Drawing	P	P+3	03
4	FAT & Certification	E-12	E-4	08
5	<b>Equipment Supply</b>	E		
6	<b>Documentation</b>	As per SOTR		
7	Preservation	As per SOTR		
	(a) In Stores OR			
	(b) On- board			
8	<b>Services of Engineers</b>	As per SOTR		
	(a) Installation			
	(b) STW			
	(c) HATs			
	(d) SATs			
	(e) For Routines			
	(f) Training			







MAZAGON DOCK SHIPBUILDERS  
LTD.  
(A Govt. Of India Undertaking)  
Dockyard Road, Mumbai -400 010.

DESIGN ENGINEERING	SOTR	3045
YARD MDL - 16401/16402/16403/1640 4/16405/16406	REV. NO.	01
MAIN DIESEL ENGINE	DATE	29/05/2024
	PAGE	66 of 66

9	OBS for two years	As per SOTR
10	Warranty	As per SOTR
11	B&D Spares	As per SOTR

\* - These end dates will be indicated as calendar dates in the Purchase Order.  
P- Placement of Purchase Order, E- Equipment Delivery, D- Planned Delivery  
**Above timelines are tentative, subject to change.**